

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner of Secs. 11, 12, 13 & 14 T. 29 N., R. 30 W., P.M.M. Lincoln County

I. 1898 G.L.O. record by Paul S. A. Bickel: Set a stone monument and four bearing trees.

1964 B.L.M. Remonumentation by Gerald F. Pittman et al: "The cor. of secs. 11, 12, 13 and 14, monumented with an argillite stone, 14 x 8 x 6 ins., firmly set and mkd. with 1 groove on the E. and 4 grooves on the S. faces and witnessed by the remains of two of the original bearing trees.

At the corner point: set an iron post, 30 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd.

T29N R30W
S11|S12
S14|S13
1964

from which

The remains of the original bearing trees:

A stump, 16 ins. diam., bears N76° 1/2' E, 55 lks. dist., mkd. with an overgrown blaze.
(Record: N76° 25' E, 55 lks.)

A stump, 26 ins. diam., bears N42° W, 95 lks. dist. mkd. with an overgrown blaze.
(Record: N42° 10' W, 95 lks.)

The new bearing trees:

A larch, 7 ins. diam., bears N32° E, 32 lks. dist., mkd. T29N R30W S12 BT.

A fir, 6 ins. diam., bears S52° E, 75 lks. dist., mkd. T29N R30W S13 BT.

A fir, 9 ins. diam., bears S61° W, 43 lks. dist., mkd. T29N R30W S14 BT.

A fir, 5 ins. diam., bears N74° W, 58 lks. dist., mkd. T29N R30W S11 BT.

Bury the original stone alongside of the iron post."

II. Found an iron pipe, 2 1/2 ins. diam., 4 ins. above the ground with 3 1/4 ins. diam., B.L.M. brass cap marked as shown above, from which

A downed snag, 16 ins. diam., bears N76° E, 36.4 ft. (55 lks.) dist., mkd. T29N R30W S12 BT.

A larch stump, 36 ins. diam., bears S62° E, 115 ft. (174 lks.) dist., mkd. T29N R30W S13 BT.
(Record: S61° 40' E, 175 lks.)

A larch stump, 24 ins. diam., bears N42° W, 62.7 ft. (95 lks.) dist., visible scribe.

A larch, 11 ins. diam., bears N32° E, 20.8 ft. (32 lks.) dist., healed face.

A fir, 11 ins. diam., bears S52° E, 49.5 ft. (75 lks.) dist., visible scribe.

A fir, 15 ins. diam., bears S61° W, 28.4 ft. (43 lks.) dist., healed face.


A downed fir snag, 7 ins. diam., bears N74° W, 38.3 ft. (58 lks.) dist., visible scribe.

III. Establish one new bearing tree:

A fir, 13 ins. diam., bears N77° W, 41.8 ft. dist., mkd. 1/4 S11 BT.

Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs.
Guard post not set.

Magnetic Declination: 20° East

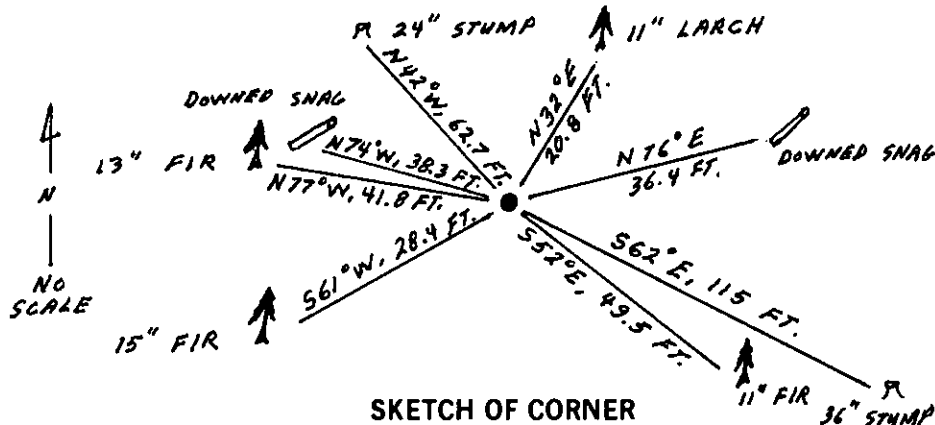

SKETCH OF CORNER

CERTIFICATION

Mark A. Federman

I, certify the information shown herein is true and correct.

Signature Ground Party Chief

Alvah F. Hughes

I, certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Signature of Surveyor & Seal: ALVAH F. HUGHES


Date: 12/15/92 Reg. No. 7322 LS

Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on 1-4-93 was noted on the cross-index plat and is assigned page No. 5251, in book No. Coral M. Cummings by B.P.

County Official

Cross Index No. J-21 T. 29 N. R. 30 W. PMM

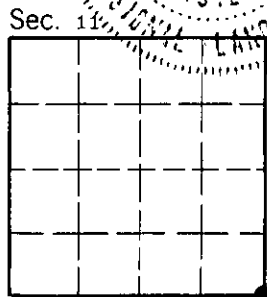

• - corner this sheet