

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner of Secs. 14, 15, 22 & 23 T. 29 N., R. 30 W., P.M.M., Lincoln County

I. 1898 G.L.O. record by Paul S. A. Bickel: Set a stone monument and four bearing trees.

1964 B.L.M. Remonumentation by Gerald F. Pittman et al: "The cor. of secs. 14, 15, 22 and 23, monumented with a slate stone, 16 x 8 x 7 ins., loosely set and mkd. with 2 grooves on the E. and 3 grooves on the S. faces, and witnessed by the remains of the original bearing trees. At the corner point; set an iron post, 30 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd.

T29N R30W
S15 | S14
S22 | S23
1964

from which

The remains of the original bearing trees:

A fir, 16 ins. diam., bears N46 3/4° E, 32 lks. dist., mkd. with an overgrown blaze.
(Record: N46 40° E, 32 lks.)

A dead fir, 20 ins. diam., bears S53 3/4° E, 42 lks. dist., mkd. with an overgrown blaze.
(Record: S53 40° E, 42 lks.)

A fir, 20 ins. diam., bears S86° W, 23 lks. dist., mkd. with an overgrown blaze.

A pine, 26 ins. diam., bears N50° W, 19 lks. dist., mkd. with an overgrown blaze.
(Record: N50 20° W, 19 lks.)

The new bearing tree:

A fir, 5 ins. diam., bears S17 1/2° E, 57 lks. dist., mkd. T29N R30W S23 BT.

Bury the original stone alongside of the iron post."

II. Found an iron pipe, 2 1/2 ins. diam., 5 ins. above the ground with 3 1/4 ins. diam. B.L.M. brass cap marked as shown above, from which

A fir snag, 16 ins. diam., bears N46 3/4° E, 21.1 ft. (32 lks.) dist., no visible scribe.

A downed fir, 20 ins. diam., bears S53 3/4° E, 27.7 ft. (42 lks.) dist., mkd. S23 T29N R30W.

A fir snag, 20 ins. diam., bears S86° W, 15.2 ft. (23 lks.) dist., mkd. 22 T29N R30W

A downed pine, 26 ins. diam., bears N50° W, 12.5 ft. (19 lks.) dist., visible scribe

A fir, 12 ins. diam., bears S17 1/2° E, 37.6 ft. (57 lks.) dist., healed face.

A fir, 15 ins. diam., bears N40° E, 44.3 ft. (67 lks.) dist., mkd. T29N R30W S14 BT. (No record)

A pine, 16 ins. diam., bears N1° E, 53.5 ft. (81 lks.) dist., visible scribe. (No record)

III. Established two new bearing trees:


A fir, 9 ins. diam., bears S71° W, 42.3 ft. dist., mkd. T29N R30W S22 BT.

A fir, 6 ins. diam., bears N29° W, 79.1 ft. dist., mkd. T29N R30W S15 BT.

Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs.

No guard post set.

Magnetic Declination: 20° East

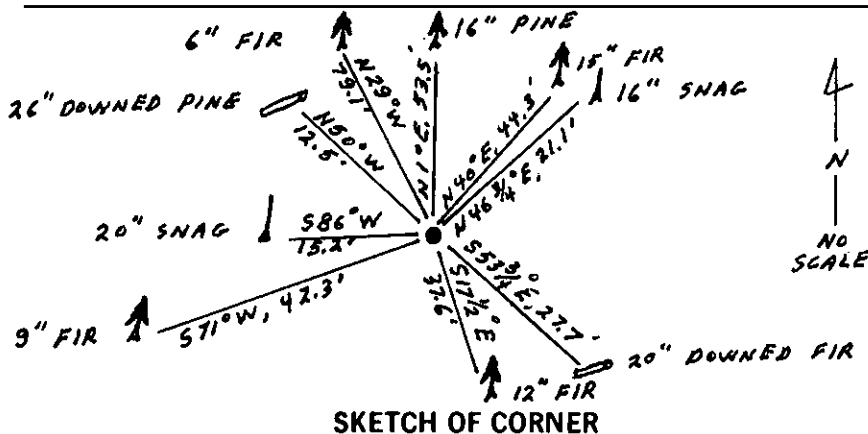

SKETCH OF CORNER

CERTIFICATION

I, Mark A. Federman
certify the information shown herein is true and correct.

Signature Ground Party Chief

Alvah F. Hughes


I, Alvah F. Hughes
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq. M.C.A.)

Signature of Surveyor & Seal
Date: 12/11/92 Reg. No. 7322, 65, 7322 IL S

Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on 1-4-93 was noted on the cross-index plat and is assigned page No. 5253, in book No. Coral M. Cummings by BLS County Official

Cross Index No. N-17 T. 29 N. R. 30 W. PMM

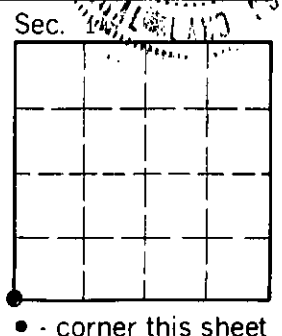

• - corner this sheet