INSTRUCTIONS

- INSTRUCTIONS


 1. Original and/or subsequent record used to evaluate the corner position.
 2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
 3. Description of monument and accessories set to perpetuate the corner position.
 4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
 5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
 6. Fill in Cross Index & Section Diagram at bottom of sheet.

Magnetic Declination: 20 East

CERTIFIED	CORNER	RECORDATION	l
OFIX LILLED	OUNITEN	NECONDATION	

Corr	ner _	C 1/4	of S	Sec. 15			T	29 N.,	R	30 W.,	_ P.M.M	Lincoln	1	County
I.	No or	iginal	reco	ord found	1.									
11.	No ev	vidence	four	nd.										
											diam., 3 as shown:		g, 26 ins.	
								T29N R3 C 1/4 • 7322L 1992						
				earing to										
					am., bears									
	Paint	ed red	band	ls around	the bear	ring tree	s and	attache	d Land	Survey M	onument a	nd Bearing	Tree signs.	

Set a 6 ft. galvanized steel guard post with Land Survey Marker and Property Boundary decals, South, 4 ft.

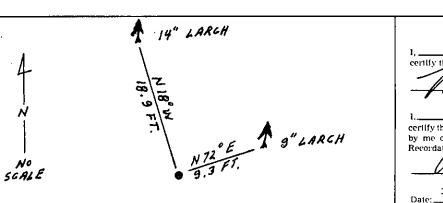

CERTIFICATION Thomas M. Hommel ormation shown herein is true and correct. certify the Signature Ground Party Chief Alvah F. Hughes certify that this Corner Record correctly represents work derformed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-10) et seq. (M.C.A.)

Signature of Surveyord Seel HUGHES

12/15/92

73:27.5

	Date:Reg. No		732	2 L
SKETCH OF CORNER	Employer:U.S. FORES	T SERVI	B PC3/5	456.
Office of Clerk and Recorder, County of Lincol	. This "corner	Sec. 1	15.4/12	<u> Tirio</u>
record" was filed for record on			_ _	 -
was noted on the cross-index plat and is assigned page No	<u>321</u> , in	 - -+	·- -	+-
book No Cotal M. Cum. County Offic	ming By DB		- -	- -
Cross Index No. L-15 T.	29 N R. 30 W PMM	• - cor	ner this	 shee