

CERTIFIED CORNER RECORDATION

CORNER SW 1/16 Cor. Sec. 1 T. 29 N., R. 31 W., P.M.M. LINCOLN COUNTY

RECORD:
NONE

179483 BOOK: CCR CC&R'S PAGE: 10662 Pages: 1
STATE OF MONTANA LINCOLN COUNTY
RECORDED: 09/27/2004 9:32 KOI: CC&R'S
CORAL M. CUMMINGS CLERK AND RECORDER
FEE: \$0.00 BY: *Laurel Kenna*
TO: FILED *Deputy*

FOUND EVIDENCE:
NONE

PERPETUATION:


Set a 3 1/4 Inch aluminum cap stamped (see diagram below) on a 5/8 Inch dia. rebar 20 inches long.
From which

A 9 inch DBH Cotton Wood scribed SW 1/16 S 1 BT bears S 68° W 11' ft dist.

A 6 inch DBH Cotton Wood scribed X BT bears S 71° E 8.1' ft dist.

Painted 6 inch wide bands and attached bearing tree signs to trees.

MAGNETIC DECLINATION: 18° E

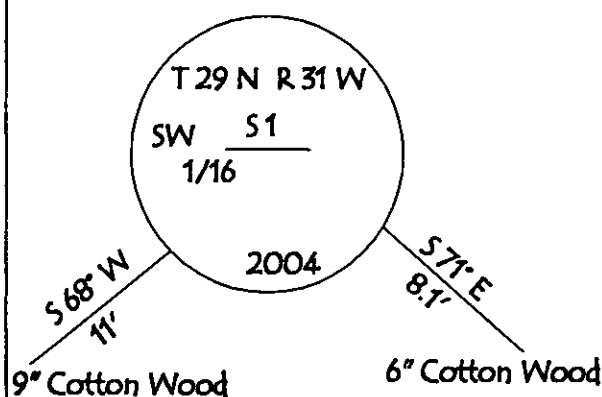

CERTIFICATION

I, GEORGE CLARK

Certify the information shown herein is true and correct

Signature of Ground Party Chief

I, KENNETH E. DAVIS

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act"

(M.S. 22-101, M.C.A.)

Signature of Surveyor & Seal

Date: 9-22-04 Reg. No. 4975-S

Employer: DAVIS Surveying Inc

SKETCH OF CORNER

Office of Clerk and Recorder, County of Lexie

This "corner record" was filed for record on 9-22-04

was noted on the cross-index plat and is assigned page

No. 10662


In book No. 179483

doc.

Deputy
County Official

Cross Index No. SW 1/16 Cor. Sec. 1 T. 29 N., R. 31 W., P.M.M.

SECTION



THIS CORNER