

CERTIFIED CORNER RECORDATION

CORNER W1/16 T. 29 N., R. 31 W., P.M.M. LINCOLN COUNTY

RECORD:

NONE

FOUND EVIDENCE:

Original stone scribed PC 1/16 which bears N74E 1.2 ft. dist. from set monument

PERPETUATION:

Set a 5/8 inch dia. rebar 24 inches long with a 3/4 inch Aluminum cap stamped (see diagram below)
From which:


A 6.5 inch DBH Douglas Fir scribed X BT bears N14°W 22.7 ft dist.

A 5 inch DBH Douglas Fir scribed X BT bears S50°E 7.6 ft dist.

Painted 6 inch wide bands and attached bearing tree tags to both trees.

MAGNETIC DECLINATION: 18° E

6.5" DOUGLAS
FIR

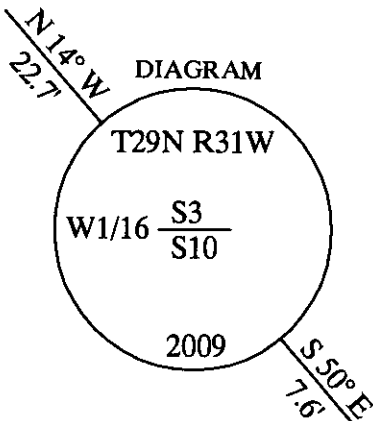

CERTIFICATION

I, George Clark
Certify the information shown herein is true and correct
Signature of Ground Party Chief

George Clark

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101 et seq., M.C.A.)

Signature of Surveyor & Seal 4975-S


Date: 6/15/09 Reg. No. 4975-S

Employer: DAVIS Surveying Inc.

SKETCH OF CORNER

Office of Clerk and Recorder, County of
219606 BOOK: CCR CC&R'S PAGE: 11292 Pages: 1
This "cor STATE OF MONTANA LINCOLN COUNTY
was note RECORDED: 06/18/2009 11:46 KOI: CC&R'S
No. TAMMY D. LAUER CLERK AND RECORDER
In book] FEE: \$0.00 BY: Jeannie Davis Deputy
TO: DAVIS SURVEYING, INC. P.O. BOX 896, TROY, MONTANA 59935

SECTION



Cross Index No. W1/16 T. 29 N., R. 31 W., P.M.M.

THIS CORNER