

CERTIFIED LAND CORNER RECORDATION

SECTION 24 TWP. 29 N., R. 31 W., M.P.M.

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

Northwest Corner; Northeast Corner; Southeast Corner;
South $\frac{1}{4}$ Corner; West $\frac{1}{4}$ Corner All Brass Cap Monuments By G.L.O.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work: Aug. 1974

At location for East $\frac{1}{4}$ Corner, established by single proportionate measurement, set a steel rod six feet long, four feet in the ground -
Posted a 3 inch pine 47.0 feet West from $\frac{1}{4}$ Corner

At location for C $\frac{1}{16}$ E established by single proportionate measurement,
set a $\frac{3}{4}$ " steel rod $2\frac{1}{2}$ feet long and posted a 10" pine which bears S 45° W
4.0 feet from $\frac{1}{16}$ Corner

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY.
(MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

SEE OTHER SIDE

Surveyor's Seal

I, Jack H. Ninneman
certify that the information shown herein is true and correct.


Jack H. Ninneman

Signature of Ground Party Chief

I, Jack W. Ninneman
certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Jack W. Ninneman
Signature of Surveyor

DIAGRAM OF CORNER:

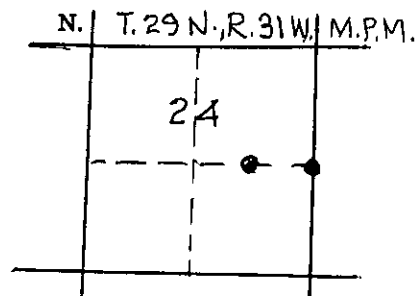

● = Corner recorded on the sheet

534 E.S.
Registration Number

Office of Clerk and Recorder, County of Lincoln

This "corner record" was filed for record on the 27th day of November 1974, was noted on the cross-index plat and is assigned page No. 374, in book No. 1

Eleanor J. Vaughn, City Clerk
County Official

SEC. 24 TWP. 29 N., R. 31 W., M.P.M.

