

CERTIFIED LAND CORNER RECORDATION

Center of Section 14 Twp. 29 N., R. 31 W. M.P.M. NOT PREVIOUSLY ESTABLISHED
DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)


Related $\frac{1}{4}$ corners all monumented with Standard Brass Tablets EXCEPT North $\frac{1}{4}$ corner, which fell in wash area of Cherry Creek, was referenced originally by a Witness Corner at 2587.2 feet S $89^{\circ}13'W$ from the northeast corner of said Section. Witness Corner destroyed by highwater, reestablished by J. Neils Lumber Co. Surveyors. Point marked by steel rod.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work: 1965

For center of Section 14 said Township and Range set a $\frac{7}{8}$ " steel reinforcing rod from which a 13" fir bears N $24^{\circ}43'W$ 41.5 feet Marked Center S 14 BT. Tagged with standard BLM Bearing Tree sign. Raised a mound of stone west of corner (Evidence of old east-west rail fence about 7 feet north of corner)
At 661.3 feet north of center of section 14 set a steel rod for $\frac{1}{32}$ Corner on north-south centerline

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY. (MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

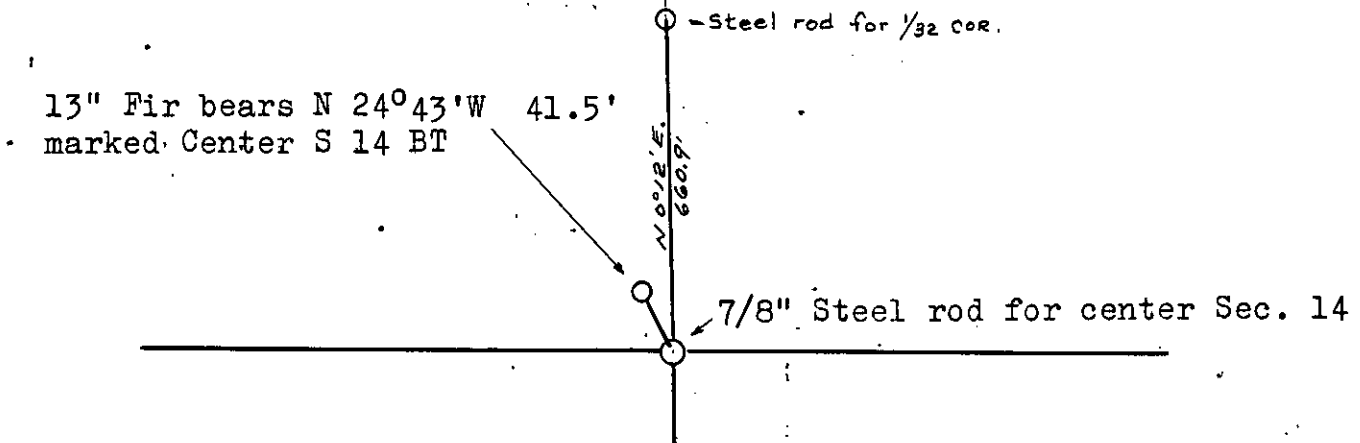

Surveyor's Seal

DIAGRAM OF CORNER:


I, *J.W. Jinneman*,
certify that the information shown herein is true and correct.

N.

J.W. Jinneman
Signature of Ground Party Chief

I, *J.W. Jinneman*,
certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

J.W. Jinneman
Signature of Surveyor



○ = Corner recorded on the sheet
Twp. 29 N., R. 31 W., M.P.M.

Montana 534ES
Registration Number

Office of Clerk and Recorder, County of Lincoln

This "corner record" was filed for record on the 4th day of April 1966, was noted on the cross-index plat and is assigned page No. 50, in book No. 1

ELEANOR L. VAUGHN,
County Official

SECTION 14 TWP., 29 North Range 31 West M.P.M.

Steel rod set by J. Neils Lumber Co. surveyors for witness corner to $\frac{1}{4}$ Cor. at 2587.2 west of NE Corner = 36.4' east of $\frac{1}{4}$ Corner.

Gov't Notes S 89°13'W
Total 5227.86'

(CLINE)

13" Fir bears N 24°43'W
41.5 feet, marked
Center S 14-BT

Set steel rod for $\frac{1}{32}$ Corner

Std.
Mon.

N 89°20'E
2609.8'

N 89°20'E
2608.6'

Std. Mon.

Set a $\frac{7}{8}$ " steel rod for center of Sec. Mound of stone west of Corner. From Corner a 13" Fir bears N 24°43'W 41.5 feet Marked Center S 14 B T Tagged with std. U.S.F.S. B.T. sign. Remains of old east-west rail fence approx. 7' north.

Gov't Notes

N 0°12'E 1984.5'
660.9'
2638.3'

Gov't Notes

N 0°01'W

Gov't Notes S 89°20'W
2619.5'

S 89°20'W
2619.5'

Std. Mon.

STATE OF MONTANA
COUNTY OF LINCOLN
Filed 4th day of April 1946
at 11:30 A.M.
by Wm. J. Neils County Clerk
Deputy