INSTRUCTIONS

- Original and/or subsequent record used to evaluate the corner position.
 Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated
- 3. Description of monument and accessories set to perpetuate the corner position.
- 4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
- 5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.

 6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

C-W-E-W 1/256 Lincoln Corner_ _County No previous record. II. No evidence found. III. At the calculated position shown by Certificate of Survey No. 2085 filed at Lincoln County Courthouse, Montana; set a 3/4 in. diam. by 30 ins. long aluminum rod, 24 ins. in the ground with 3 1/4" diam., U.S.D.A., Forest Service aluminum cap, marked as shown: **\$14** C-W-E-W

> 1/256 9008LS 1992


No Bearing Trees available.

Set a 6 ft. galvanized steel guard post with Land Survey Marker and Property Boundary decals. North and East, 3 ft.

Magnetic Declination: 20° East



· - corner this sheet

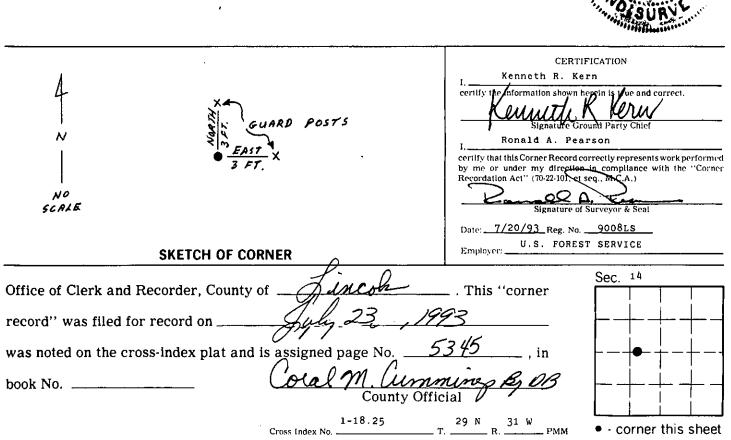

1-18.25

Cross Index No. .

29 N