

INSTRUCTIONS


1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

#62-82-5

CERTIFIED CORNER RECORDATION

Corner E 1/2 Sec. 28 T. 30N R. 26W P.M.M. Lincoln County

- Set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 22 ins. in the ground with BLM Aluminum Cap marked as shown below, raised a collar of stone four ft. dia. around the pipe, from which:
A larch 8 ins. diam., bears S58.25°E, 25 lks. dist. marked 1/4 S27 BT.
A fir 6 ins. diam., bears S35°W, 53 lks dist. marked 1/4 S28 BT.
- Found an aluminum post with BLM Cap as described above, found 2 bearing trees. Painted corner and all blazes red. Set fiberglass post alongside corner.

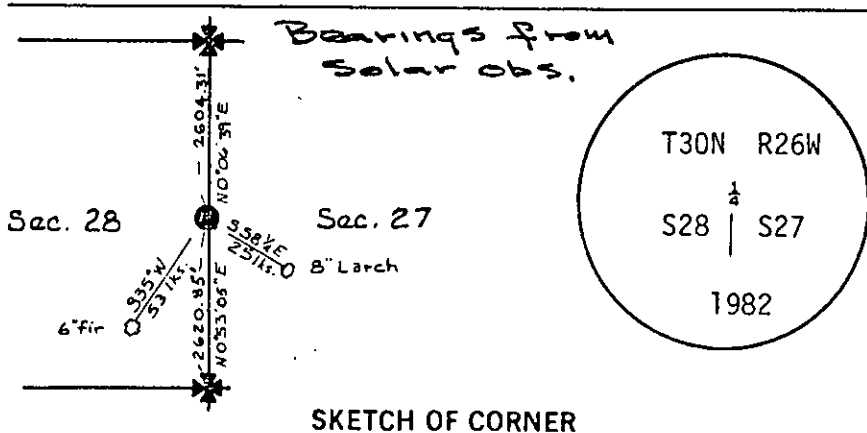

CERTIFICATION

I, _____
certify the information shown herein is true and correct.

Signature Ground Party Chief

I, William Condrey

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.)

Signature of Surveyor & Seal

Date: 12-2-82 Reg. No. 54253


Employer: Associated Surveys, Inc.

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the August 25th day of 1983 was noted on the cross-index plat and is assigned page No. 2319, in book No. _____

Janet BF Siegel by Betty L. Conces
County Official deputy

Cross Index No. T-13 T. 30N R. 26W P.M.M.

Sec. 28

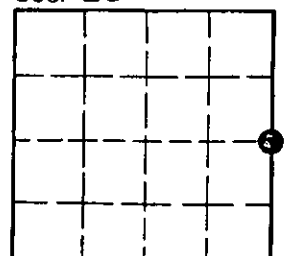

• corner this sheet