

CERTIFIED LAND CORNER RECORDATION

Double Quarter corners between Sections 7 and 8 Twp. 30 N., R. 26 W., M. P. M.

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

August 1903 From corner to Sections 5,6,7,8, run S 0°05' E on a true line between Secs. 7 and 8 38.0 Ch. Set a sandstone 12X8X6 ins. 8 ins. in ground for  $\frac{1}{4}$  Corner for Section 7 marked  $\frac{1}{4}$  on West face from which a tamarack 30 ins. in dia. bears S 78° W 15 lks. dist. marked  $\frac{1}{4}$  S7 BT A pine 3 ins. in dia. bears N 34°30' W 31 lks. dist. marked  $\frac{1}{4}$  S7 BT 40.0 ch. set a limestone 12X8X6 ins. 8 ins. in ground for  $\frac{1}{4}$  Sec. Cor. for Sec. 8, marked  $\frac{1}{4}$  on W. face from which A Fir 10 ins. in dia. bears N 56°30' E 45 lks. dist. marked  $\frac{1}{4}$  S8 BT. A pine 4 ins. in dia. bears S 12°45' E 15 lks dist. marked  $\frac{1}{4}$  S 8 BT.

Corners reestablished by B.L.M. see below

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:


Date of work: 1971

Standard Brass cap monuments were set by Art Trinkle representing Bureau of Land Management to perpetuate the double quarter corners between Sections 7 and 8 Twp. 30 N., R. 26 W., M. P. M.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY. (MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

SEE REVERSE SIDE

Surveyor's Seal

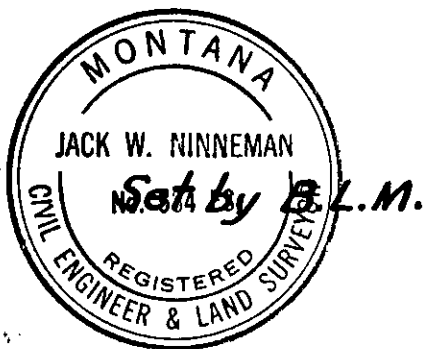

I, Jack H. Ninneman  
certify that the information shown herein is true and correct.

*Jack H. Ninneman*  
Signature of Ground Party Chief

I, Jack W. Ninneman  
certify that I have carefully ~~performed or~~ reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

*Jack W. Ninneman*  
Signature of Surveyor

DIAGRAM OF CORNER:

N.  
See reverse side

= Corner recorded on the sheet

Mont. 534 E.S.  
Registration Number

Office of Clerk and Recorder, County of Lincoln

This "corner record" was filed for record on the 25<sup>th</sup> day of July 1972, was noted on the cross-index plat and is assigned page No. 1, in book No. 279 Eleanor L. Vaughn, County Official

Y552175.68  
X694950.36

**Twp. 30 N., R. 26 W.,  
M.P.M.**

STANDARD BRASS CAP MONUMENTS WERE SET  
BY ART TRINKLE REPRESENTING BUREAU OF  
LAND MANAGEMENT TO PERPETUATE THE DOUBLE  
QUARTER CORNERS BETWEEN SECTIONS  
7 AND 8 TWP. 30 N., R. 26 W., M.P.M.

Coordinates and Bearings  
on Montana Lambert Grid  
North Zone

