

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

GLO NOTES 1893

ORIGINAL, RECORDED IN VOL. 2781 PAGE 40 DATE ~~OF GLO NOTES 1893~~

A. 20" X 10" X 4" LIMESTONE WAS SET FOR 1/4 COR <sup>22</sup>/<sub>27</sub>, BURIED 15" IN GROUND AND MARKED 1/4 ON N. FACE. RECOVERED AS DESCRIBED

A 10" YELLOW PINE MKD. "1/4 S.B.T." BRG. N 29 W. A DISTANCE OF 59 LINKS SET ORIGINALLY WAS FOUND AS DESCRIBED GOOD SHAPE


A 6" YELLOW PINE MKD 1/4 S.B.T. BRG S 19 E A DISTANCE OF 50 LINKS WAS SET ORIGINALLY, THE BIT WAS RECOVERED AT THE GLO DISTANCE THE BIT IS NOW A BURNT STUMP SCRIBING WAS IN GOOD EVIDENCE.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

THE STONE WAS REPLACED BY A 2 1/2" X 2" PIPE <sup>Date of work: MAY 1964</sup> WAS BURIED ON SOUTH SIDE OF PIPE. BRASS CAP WAS LEFT 6" HIGH IN A PILE OF STONE, STAMPED AS SHOWN BELOW.

A 6" LODGEPOLE PINE MKD. WITH A F.S./R.M. ADT. A DISTANCE OF 23.0 FEET AND BEARING S 65 W FROM 1/4 CORNER WAS SET BY THIS PARTY

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY. (MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

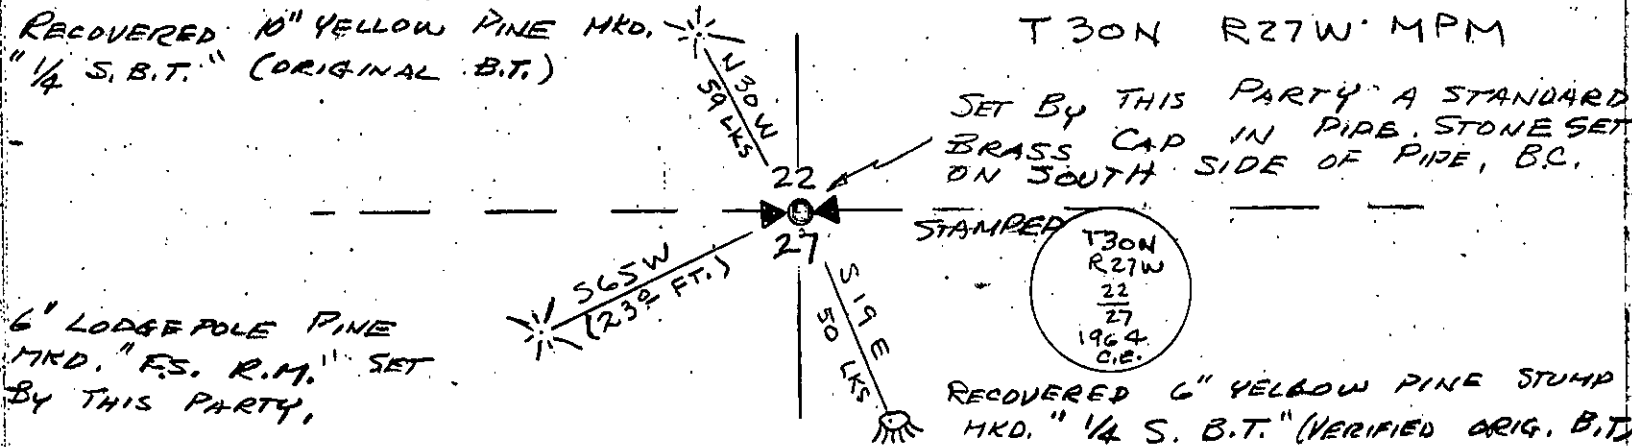


Surveyor's Seal



I, LAVERNE L ESTES  
 certify that the information shown herein is true and correct.  
*Laverne L. Estes*  
 Signature of Ground Party Chief

I, LAWRENCE A SIGNANI  
 certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.  
*Lawrence A. Signani*  
 Signature of Surveyor

DIAGRAM OF CORNER:

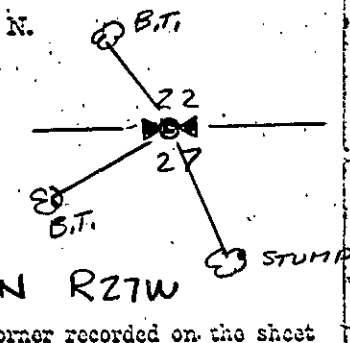

11422  
Registration Number

Office of Clerk and Recorder, County of Linn

This "corner record" was filed for record on the 28th day of February, 1972, was noted on the cross-index plat and is assigned page No. 267, in book No. 1

*Clarence L. Vaughn*  
 County Official  
*Marjorie Watson*  
 Deputy