## CERTIFIED LAND CORNER RECORDATION

SECTION 22 TWP. 30 N., R. 27 W., M.P.M.

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

NW Corner found B.L.M. - B.C. & 5 B.T.s N  $\frac{1}{4}$  Corner found B.L.M. - B.C. & 2 B.T.s W  $\frac{1}{4}$  Corner found B.C.W.C. 33 feet south - 1 B.T. Stump S $\frac{1}{4}$  Corner found C.of C. B.X. - 3 B.T.s

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work: Feb. 1976

SEE REVERSE SIDE

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY.

(MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)


SEE REVERSE SIDE

FORM 125 - 41483

		DIAGRAM OF CORNER:
Surveyor's Seal	I, Jack H. Ninneman certify that the information shown herein is true and correct.  Jack & Ninneman	N. See Reverse Side
~	Signature of Ground Party Chief  Jack W. Ninneman I,	
· , · · · · ·	certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.  Signature of Surveyor	= Corner recorded on the sheet
	534 E.S. Registration Number	
Office of Clerk and Recorder, Cou	inty of Zincoln	
This "corner record" was filed fo	or record on the day of Jume 1974, wa	s noted on the cross-index plat and is
assigned page No. 483	or record on the The day of Jume 1974, was, in book No. 1	Laughn by Sherry

Cross Index No.....

## TWP. 30 N., R. 27W.

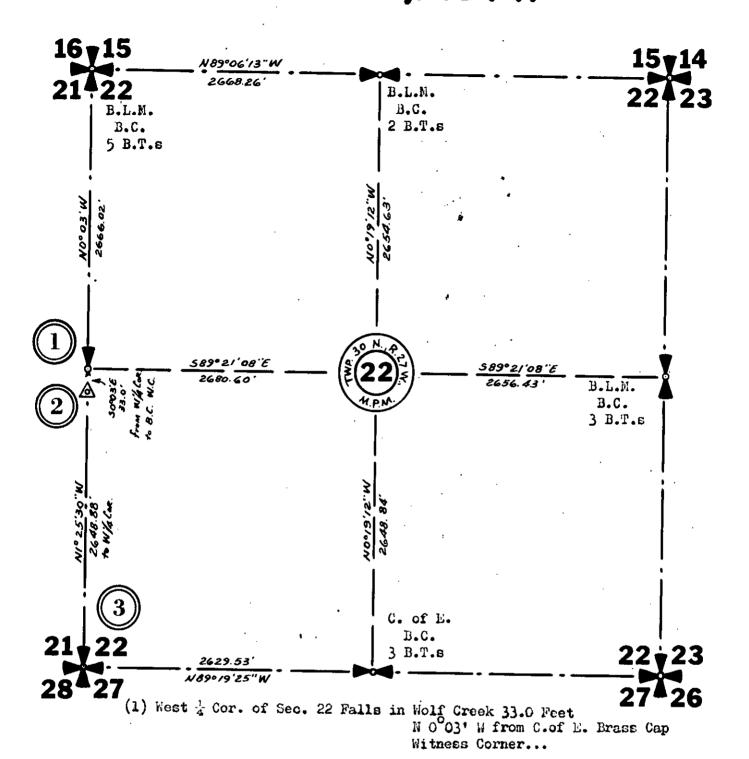

- (2) Found B.C. by Corps of Engineers- 1 B.T. Stump S 36°30' E 64.2 feet WITNESS CORNER
- (3) Set B.C. in Rock Pile Location Poster N 43°43' W 30.1 feet on Fence Post