


INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography lies, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner S 1/4 of Sec. 20 T. 30 N. R. 27 W. P.M.M. Lincoln County

- I. 1893 G.L.O. original record by A. L. JAQUETH et al: A rock in place, 18x14 ins., 7 ins. above ground, which I mark with a cross "X" at exact corner point, and 1/4 on N. face, from which:
- A pine, 2 ins. diam., bears N6°20'E, 22 lks. dist., mkd. 1-4 S BT.
 - A pine, 3 ins. diam., bears S78°E, 18 lks. dist., mkd. 1-4 S BT.
- II. Found a firmly set stone, 12x10 ins., 6 ins. above ground, with 1/4 on N. face. No "X" found. Top of stone has been broken due to heavy logging activity.
- No bearing trees found due to recent logging activity.
- III. At the position of the found stone, set a 2 1/2 in. diam., 30 in. long aluminum pipe, 14 ins. in the ground, with a 3 1/4 in. U.S.D.A. Forest Service aluminum cap marked as shown:



Established 2 new bearing trees.


- A fir, 8 ins. diam., bears N28°W, 22.0 ft. dist., mkd. 1/4 S20 BT.
- A larch, 12 ins. diam., bears S19°W, 65.3 ft. dist., mkd. 1/4 S29 BT.

Due to the large size of found corner stone, (22x13x16 ins.), I do not bury it. I efface the 1/4 from the N. face and place the stone alongside the aluminum pipe above ground.

Painted a red band around bearing trees and attached Land Survey Monument and Bearing Tree signs.

Set a 6 ft. galvanized steel guard post with Land Survey Marker and Property Bounday decals, WEST, 3 feet.

Magnetic Declination: 20° East.

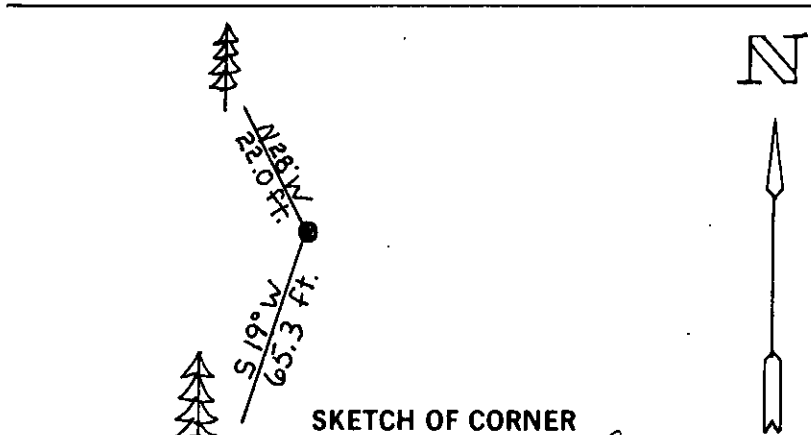

SKETCH OF CORNER

CERTIFICATION

I, Thomas M. Hommel
certify the information shown herein is true and correct.

Thomas M. Hommel
Signature Ground Party Chief

I, Alvah F. Hughes
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.).


Alvah F. Hughes
Signature of Surveyor & Seal

Date: 12/29/93 Reg. No. 7322LS

Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on Jan 18, 1994 was noted on the cross-index plat and is assigned page No. 6112, in book No. _____

Coral M. Cummins
County Official



Cross Index No. B-7 T. 30N R. 27W P.M.M.

• - corner this sheet