

## INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography lies, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION


Corner S.E. of Sec. 20 T. 30 N. R. 27 W. P.M.M. Lincoln County

- I. 1893 G.L.O. original record by A. L. JAQUETH et al: Set a post, 4 ins. square and 4 ft. long, 24 ins. in the ground for Cor. to Secs. 20, 21, 28, & 29 and established 4 bearing trees.

1971 B.L.M. remonumentation record by J. E. FRENCH: The cor. of secs. 20, 21, 28, & 29, as determined from the original S.E. bearing tree.

A pine, 18 ins. diam., bears S.  $70^{\circ} 40'$  E., 31 lks. dist., mkd. T30N R27W S28 BT.

At the corner point, set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.



from which the new bearing trees:

A larch, 8 ins. diam., bears N  $53^{\circ}$  E, 50 lks. dist., mkd. T30N R27W S21 BT.

A larch, 7 ins. diam., bears S  $66 \frac{1}{4}^{\circ}$  W, 21 lks. dist., mkd. T30N R27W S29 BT.

A pine, 7 ins. diam., bears N  $60 \frac{1}{2}^{\circ}$  W, 55 lks. dist., mkd. T30N R27W S20 BT.

Raise a flat mound of stone, 3 1/2 ft. base, around the iron post.

- II. Found a 2 1/2 in. diam. iron pipe, 6 ins. above ground, firmly set, with B.L.M. brass cap mkd. as shown above, from which:

A larch, 11 ins. diam., bears N  $53^{\circ}$  E, 33.0 ft. (50.0 lks.) dist., healed face.

A fallen pine, 16 ins. diam., bears S  $70^{\circ}$  E, 20.4 ft. (31.0 lks.) dist., mkd. "T30N R27W S".

A larch, 10 ins. diam., bears S  $66^{\circ}$  W, 13.8 ft. (21.0 lks) dist., healed face.

A fallen pine, bears N  $60^{\circ}$  W, 36.3 ft. (55.0 lks.) dist., mkd. "T30N R27W S20 BT".

- III. Established two new bearing trees:


A larch, 15 ins. diam., bears S  $87^{\circ}$  E, 16.4 ft. dist., mkd. T30N R27W S28 BT.

A larch, 11 ins. diam., bears N  $53^{\circ}$  W, 76.85 ft. dist., mkd. T30N R27W S20 BT.

Painted a red band around bearing trees and attached Land Survey Monument and Bearing Tree signs.

Set a 6 ft. galvanized steel guard post with Land Survey Marker and Property Bounday decals, WEST, 3 feet.

Magnetic Declination:  $20^{\circ}$  East.

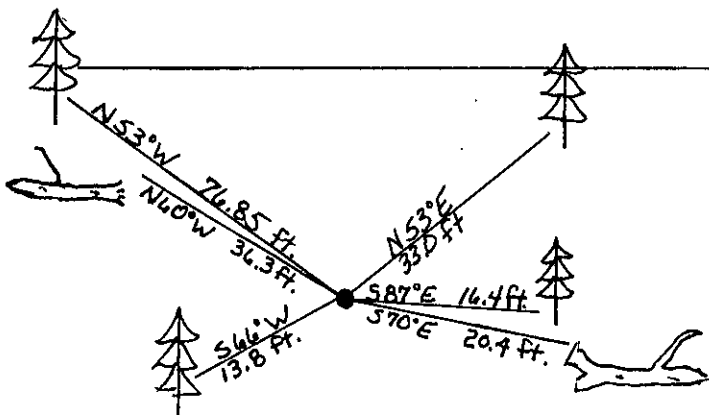

SKETCH OF CORNER

## CERTIFICATION

I, Mark Federman  
certify the information shown herein is true and correct.

Mark Federman  
Signature Ground Party Chief  
Alvah F. Hughes

I, Alvah F. Hughes  
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Alvah F. Hughes  
Signature of Surveyor & Seal

Date: 12/30/93 Reg. No. 7322LS


Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on Jan 18, 1994 was noted on the cross-index plat and is assigned page No. 6114, in book No. Corral M. Cummings By RB

County Official

Cross Index No. R-9 T. 30N R. 27W P.M.M.

Sec. 20



• corner this sheet