

CERTIFIED LAND CORNER RECORDATION
(REFERENCE FSM 7153.53)

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)


Did not find original corner post (Record-post 4 ft. long 4 ins. square, 24" in ground) Sec. 33 and 34 BT's destroyed by cat road (Record-12" Black Fir N66°E, 28 links and 8" Black Fir N15°W, 94 links) The SE BT is now a 16" Larch and the scribing has been destroyed (Record-12" Tamarack S54°E, 32 links) The BT,SW is a stump. The tree has been cut, with the scribed log lying beside stump. (Record-6" Black Fir S50°W, 39 links)

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Set 1½" GI pipe, 28" long with brass cap marked as shown and established two new BT'S.

Date of work: 7-19-63

New BT- 6" Fir, marked FSRM bears N36°30'E, 52 links.
New BT- 6" Fir, marked FSRM, bears N84°W, 46 links.

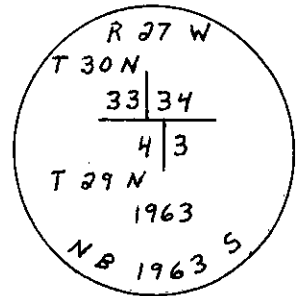

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY.
(MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

(Record from original GLO notes)

Surveyor's Seal


I,
certify that the information shown herein is true and correct.

Signature of Ground Party Chief

I, Norman Berg
certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Norman Berg
Signature of Surveyor

DIAGRAM OF CORNER:

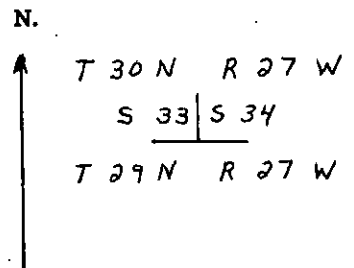

= Corner recorded on the sheet

1963-5
Registration Number

Office of Clerk and Recorder, County of Lincoln

This "corner record" was filed for record on the 12th day of April, 1964, was noted on the cross-index plat and is assigned page No. 97, in book No. 1

Charles L. Vaughan
County Official

Cross Index No. 3-13 T. 30 R. 27 Mer.