

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner CC & 16 HES 825 T. 30 N. R. 28 W. P.M.M. Lincoln County

I. 1919 HES 825 record by W. P Stephenson: Intersect the point for the 1/64 corner on the line between Sec. 13, T30N R29W and Sec. 18, T30N R28W. I adopt this point for cor. no. 16 and the closing corner of this survey and place a small stone mkd. with a cross (X), under a limestone, 24x12x8 ins., 14 ins in the ground, mkd. 16 HES 825 on the NE face, CC on the SE face, and a cross (X) on top for the exact corner point, from which:

- A cross (X) on a tamarack tree, 8 ins. diam., bears N 59° 33' W, 26 lks. dist.
- A cross (X) on a tamarack tree, 10 ins. diam., bears N 6° 25' W, 37 lks. dist., each blazed and scribed 16 HES 825 BT.

Raise a mound of stone 4 ft. base, 2 ft. high, N 58° 20' W, 3 1/4 ft.

II. Found a stone, 24x12x8 ins., firmly set in place, mkd. 16 HES 825 on the NE face, CC on the SE face, (GLO record), 1/64 S on the N face (unknown origin), and a cross (X) on top from which:

- A dead larch, 14 ins. diam., bears N 59° W, 17.2 ft. (26 lks.) dist., mkd. with a healed face.
- A dead larch, 18 ins. diam., bears N 6° W, 24.4 ft. (37 lks.) dist., mkd. with a healed face.


III. Established two new bearing trees

- A fir, 12 ins. diam., S 82° E, 26.9 ft. dist., mkd. 16 HES 825 BT.
- A larch, 9 ins. diam., S 4° E, 19.1 ft. dist., mkd. 16 HES 825 BT.

Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs.

Set a 6 ft. galvanized steel guard post with Land Survey Marker and Property Boundary decals, S 58° E, 4 ft.

Magnetic declination: 20° East

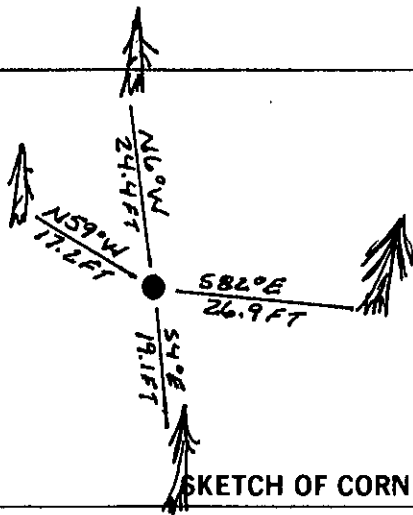

SKETCH OF CORNER

CERTIFICATION


I, Kenneth R. Kern
 certify the information shown herein is true and correct.
 Signature Ground Party Chief

I, Alvah F. Hughes
 certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq.) M.C.A. ALVAH F. HUGHES
 Signature of Surveyor & Seal

Date: 12/1/92 Reg. No. 7322
 Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on Jan 19, 1993 was noted on the cross-index plat and is assigned page No. 5291, in book No. _____

Coral M. Cumming
 County Official



Cross Index No. CC & 16 HES 825 T. 30 N. R. 28 W. P.M.M.

• - corner this sheet