

# CERTIFIED LAND CORNER RECORDATION

$\frac{1}{4}$  Corner Sections 28 & 29 T. 30 N., R. 29 W., MPM

Record: (1898 BLM) Set a slate stone 20x12x6 ins, 15 ins in the ground for  $\frac{1}{4}$  section corner mkd  $\frac{1}{4}$  on W face from which:

A pine 18" diam bears N45°45'E, 90 lks dist mkd  $\frac{1}{4}$  S28BT  
A tamarack 20" diam bears S89°20'W, 105 lks dist mkd  $\frac{1}{4}$  S29BT

Found: (1976) A slate stone 20x12x6", 15 ins in the ground mkd  $\frac{1}{4}$  on W. face.

A dead tamarack tree, 28" diam bears S89°20'W, 105 lks mkd  $\frac{1}{4}$  S29BT  
A stump hole & fallen log bears N45°45'E, 90 lks no mks visible.

Set: (1976) Scribed an X on top of stone

Blazed & scribed a 10" Tamarack tree 16.50 ft. dist mkd RM  
Blazed & scribed a 6" Tamarack tree 20.10 ft. dist mkd RM

See certificate of survey # 213 for ties to adjacent corners.

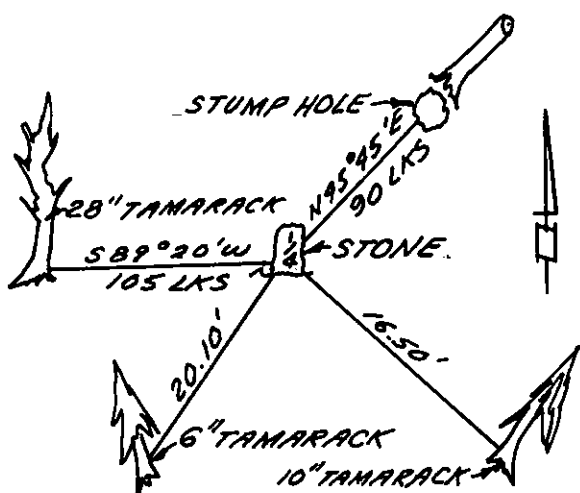


DIAGRAM OF CORNER

I, James R. Weatherly  
certify that the information shown herein is true and correct.

James R. Weatherly  
Signature of Ground Party Chief

Gordon E. Sorenson

certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Gordon E. Sorenson  
Signature of Surveyor

5-21-76

Date

2345 ES

Registration Number

SORENSEN & COMPANY

Office of Clerk and Recorder, County of Lincoln

This "corner record" was filed for record on the 2<sup>nd</sup> day of June 1976, was noted on the cross-index plat and is assigned page No. 453, in book No. 1. Eleanor L. Vaughn, Mary Watson, Deputy  
County Official

Cross Index No. T-9 T. 30N R. 29W Mer.