


CERTIFIED LAND CORNER RECORDATION

Corner SW 1/16th Cor. Section 21 T. 30 N, R. 29 W, MPM

Record: No known record

Set: (1976) By proportion I determine the exact corner position and set a 2" iron pipe 24" long, 22" in the ground with screw and washer marked:

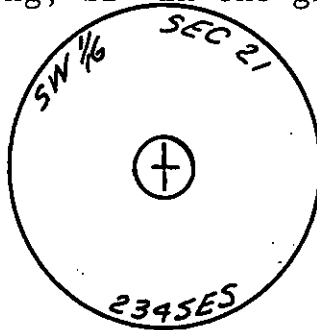

From which:

- A blazed and scribed 8" fir is 65.10' distant, mkd RM
- A blazed and scribed 14" pine is 15.7' dist, mkd RM

See certificate of survey # 213 for ties to adjacent corners.

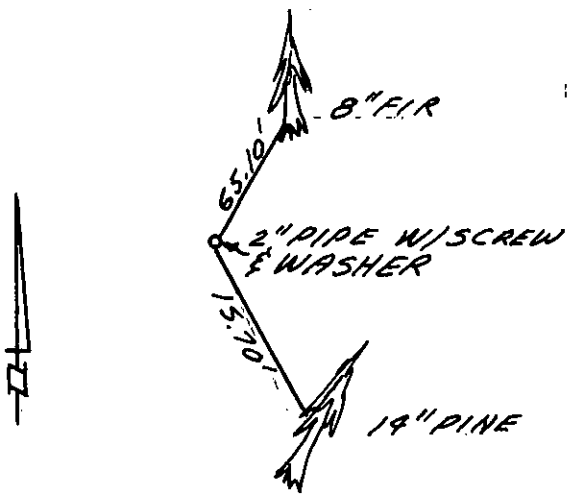


DIAGRAM OF CORNER

I, James R. Weatherly
 certify that the information shown herein is true and correct.

[Signature]
 Signature of Ground Party Chief

I, Gordon E. Sorenson
 certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

[Signature]
 Signature of Surveyor

5-21-76

Date

2345ES

Registration Number

SORENSON & COMPANY

Office of Clerk and Recorder, County of Lincoln

This "corner record" was filed for record on the 2nd day of June 19 76, was noted on the cross-index plat and is

assigned page No. 455, in book No. 1. Elmer L. Vaughn, Mae Watson, Deputy
 County Official

Cross Index No. Q-10 T. 30 N R. 29 W Mer.