


# CERTIFIED LAND CORNER RECORDATION

Corner NW 1/16th Cor Section 28 T. 30 N, R. 29 W, MPM

Record: No known record

Set (1976): By proportion I determine the exact corner position and set a 2" iron pipe, 24" long, 22" in the ground with screw and washer marked:

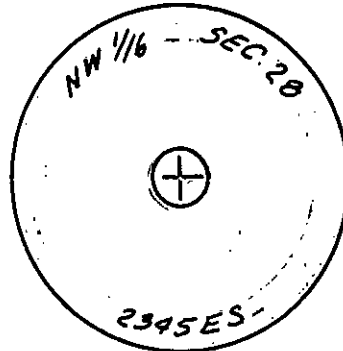

From which:

A blazed and scribed 14" fir tree is 10.7 ft. dist, mkd RM  
A blazed and scribed 11" fir tree is 24.2 ft. dist, mkd RM

See certificate of survey # 213 for ties to adjacent corners.

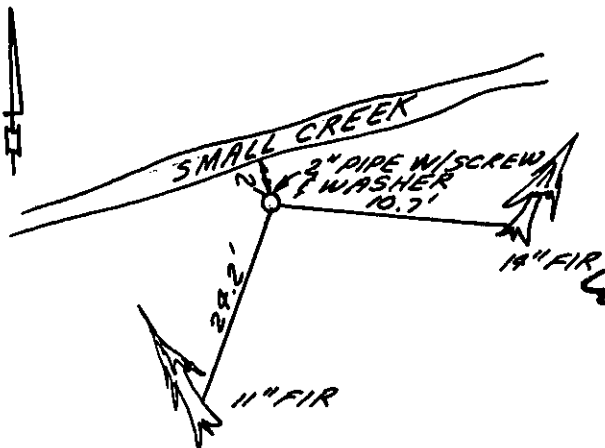


DIAGRAM OF CORNER

I, James R. Weatherly  
certify that the information shown herein is true and correct.

[Signature]  
Signature of Ground Party Chief

I, Gordon E. Sorenson  
certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

[Signature]  
Signature of Surveyor

5-21-76

Date

2345ES

Registration Number

SORENSEN & COMPANY

Office of Clerk and Recorder, County of Lincoln

This "corner record" was filed for record on the 2<sup>nd</sup> day of June 19 76, was noted on the cross-index plat and is assigned page No. 456, in book No. 1

Eleanor L. Vaughn Mae Watson, Deputy  
County Official

Cross Index No. S-10 T. 30 N R. 29 W Mer.