


CERTIFIED LAND CORNER RECORDATION

Corner C-W 1/16th Corner Section 21 T. 30 N, R. 29 W, MPM

Record: No known record

Set: (1976) By proportion between the C 1/4 cor and W 1/4 cor of sec 21 I determine the exact corner position and set a 2" iron pipe, 24" long, 22" in the ground with screw and washer marked:



Blazed and scribed an 8" fir tree 29.70 ft. dist mkd RM
Blazed and scribed a 12" fir tree 15.60 ft. dist mkd RM

See certificate of survey # 213 for ties to adjacent corners.

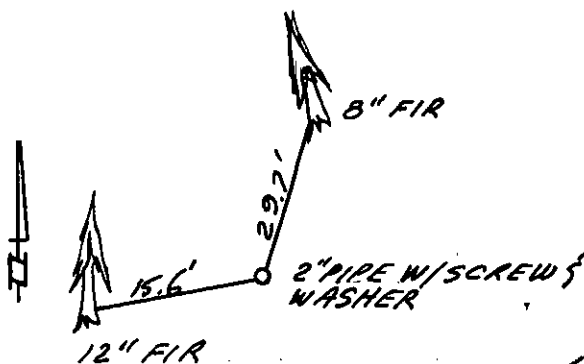


DIAGRAM OF CORNER

I, James R. Weatherly
certify that the information shown herein is true and correct.

[Signature]
Signature of Ground Party Chief

I, Gordon E. Sorenson
certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

[Signature]
Signature of Surveyor

5-21-76

2345ES

Date

Registration Number

SORENSON & COMPANY

Office of Clerk and Recorder, County of Lincoln

This "corner record" was filed for record on the 2nd day of June 19 76, was noted on the cross-index plat and is assigned page No. 457, in book No. 1

Eleanor L. Vaughn Max Watson Deputy
County Official

Cross Index No. P-10 T. 30 N R. 29 W Mer.