

CERTIFIED LAND CORNER RECORDATION

Corner Section 21, 22, 27 & 28 T. 30 N, R. 29 W, MPM

Record: (1964 BLM) An iron post, 30" long, 2 1/2" diam, 10" in the ground to bedrock, and a mound of stone, 5' diam top with brass cap marked:

T. 30 N. R. 29 W.
S 21 S 22
S 28 S 27
1964

From which:

A stump, 12" diam, bears N 35 3/4°E, 30 lks. dist., visible marks S22.

A pine, 13" diam, bears S 65°E, 116 lks dist., mkd with an overgrown blaze.

A pine, 18" diam, bears S 29 3/4°W, 81 lks dist, mkd with an overgrown blaze.

A stump, 20" diam, bears N 14°W, 66 lks dist, mkd T 30 N R 29 W S21 BT

A fir, 5" diam, bears N 50°E, 66 lks dist, mkd T 30 N R 29 W S22 Bt

A fir, 5" diam, bears N 20°W, 55 lks dist, mkd T 30 N R 29 W S21 BT

Bury original stone alongside of iron post.

Found: (1976) Iron post w/brass cap & mound of stone
A rotted stump 12" diam bears N 35 3/4°E, 30 lks
A rotted pine, 13" diam bears S 65°E, 116 lks
A rotted stump 18" diam bears S 29 3/4°N, 81 lks
A pine 20" diam bears N 14°W, 66 lks dist.
A fir, 7" diam, bears N 50°E, 66 lks dist.
A fir, 7" diam, bears N 20°W, 55 lks dist.

See certificate of survey # 213 for ties to adjacent corners.

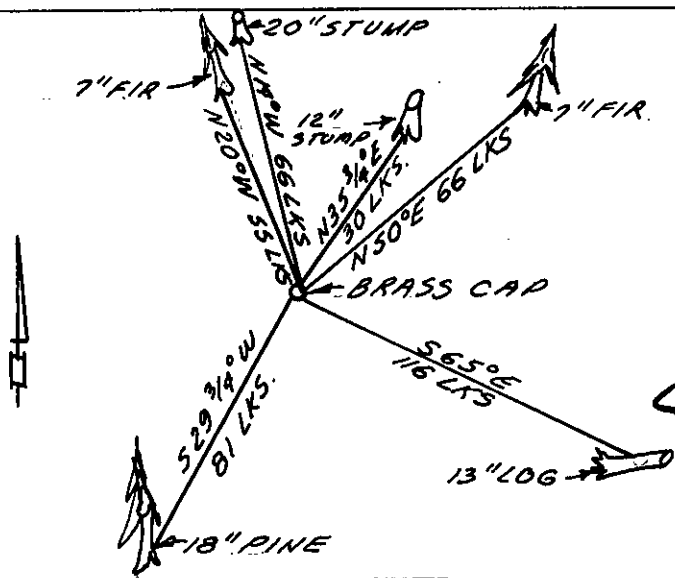


DIAGRAM OF CORNER

I, James R. Weatherly
certify that the information shown herein is true and correct.

[Signature]
Signature of Ground Party Chief

Gordon E. Sorenson
certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

[Signature]
Signature of Surveyor

5-24-76

Date

2345ES

Registration Number

SORENSEN & COMPANY

Office of Clerk and Recorder, County of Lincoln

This "corner record" was filed for record on the 22nd day of June 19 76, was noted on the cross-index plat and is assigned page No. 459, in book No. 1. Eleanor L. Vaughn, Mae Watson, Deputy
County Official

Cross Index No. R-13 T. 30 N R. 29 W Mer.