

CERTIFIED LAND CORNER RECORDATION

1/4 Corner Sections 28 & 27 T. 30 N., R. 29 W., MPM

Record: (1965 BLM) Set an iron post, 30" long, 2 1/2" diam, 26" in the ground, with brass cap mkd:

T. 30 N. R. 29 W.
1/4
S 28 | S 27
1965

From which:

A stump hole, bears N 80°E, 62 lks dist, with fallen log mkd 1/4 S 27 BT

A snag, 20" diam, bears S 6°50'W, 50 lks dist, mkd 1/4 S 28 BT

A fir, 10" diam, bears S 49 1/2°E, 12 lks dist, mkd 1/4 S 27 BT

A fir 6" diam, bears S 61°W, 28 lks dist, mkd 1/4 S 28 BT

Bury original stone alongside of iron post.

Found: (1976) Iron post w/brass cap and bearing trees as described above.

See certificate of survey # 213 for ties to adjacent corners.

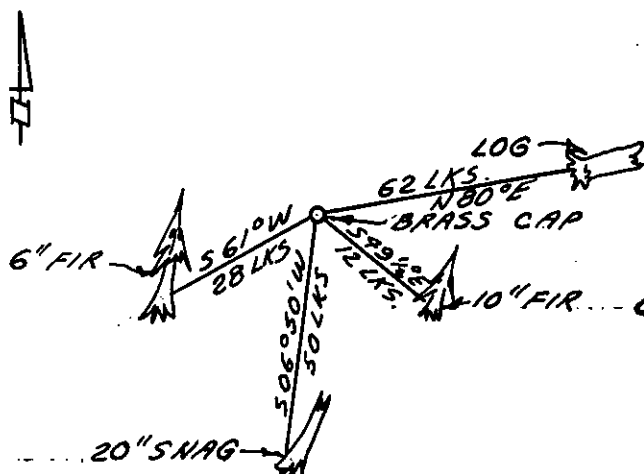


DIAGRAM OF CORNER

I, James R. Weatherly
certify that the information shown herein is true and correct.

[Signature]
Signature of Ground Party Chief

I, Gordon E. Sorenson
certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

[Signature]
Signature of Surveyor

5-21-76 Date 2345ES Registration Number

SORENSEN & COMPANY

Office of Clerk and Recorder, County of Lincoln
This "corner record" was filed for record on the 2nd day of June 1976, was noted on the cross-index plat and is assigned page No. 460, in book No. 1
Eleanor L. Vaughn, Mae Watson, Deputy
County Official

Cross Index No. T-13 T. 30 N R. 29 W Mer.