

**CERTIFIED LAND CORNER RECORDATION**

Corner Sections 20 & 21 T. 30 N, R. 29 W, MPM

Record: (1965 BLM) Set an iron post, 30" long, 2 1/2" diam, 26" in the ground, with brass cap mkd.

T. 30 N. R. 29 W.  
1/4  
S 20 | S 21  
1965

A stump hole, bears N 37°E, 147 lks dist, with fallen log mkd. 1/4 S21 BT

A stump, 22" diam, bears N 41°20'W, 71 lks dist, mkd 1/4

A fir, 11" diam, bears N 68 1/2°E, 34 lks dist, mkd 1/4 S21 BT

A fir, 9" diam, bears S 62 1/2°W, 45 lks dist, mkd 1/4 S20 BT

Bury the original stone alongside the iron post.

Found: (1976) Iron post w/brass cap and bearings trees as described above.

See certificate of survey # 213 for ties to adjacent corners.

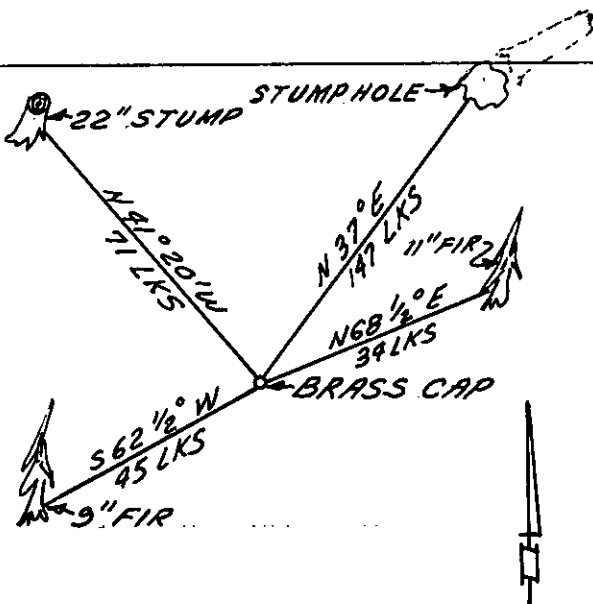


DIAGRAM OF CORNER

I, James R. Weatherly  
certify that the information shown herein is true and correct.

*[Signature]*  
Signature of Ground Party Chief

I, Gordon E. Sorenson  
certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

*[Signature]*  
Signature of Surveyor

5-21-76

Date

2345ES

Registration Number

BORENSON & COMPANY

Office of Clerk and Recorder, County of Lincoln

This "corner record" was filed for record on the 2nd day of June 1976, was noted on the cross-index plat and is

assigned page No. 461, in book No. 1. Eleanor L. Laughon, Mae Watson, Deputy  
County Official

Cross Index No. P-9 T. 30 N R. 29 W Mer.