INSTRUCTIONS

- 1. Original and/or subsequent record used to evaluate the corner position.
- 2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated
- 3. Description of monument and accessories set to perpetuate the corner position
- 4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.

 5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
- 6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Sec. Cor. of sec. 1, 2, 11, and 12 Corner .County

1903 original G.L.O. record by George A. Fessenden and Ranney Y. Lyman: "Set a slate stone, 20 X 8 X 8 ins., 12 ins. in the ground, for cor. of secs. 1,2,11, and 12 marked with 5 notches on S. and 1 notch on E. edge. from which


A tamarack, 6 ins. dia., bears $N30^{\circ}E$, 22 lks. dist., mkd. T30N R29W S1 B.T.

A tamarack, 4 ins. dia., bears S44°E, 66 lks. dist., mkd. T30N R29W S12 B.T.

A pine, 16 ins. dia., bears $884^{\circ}30$ W, 51 lks. dist., mkd. T30N R29W S11 B.T.

A tamarack, 20 ins. dia. bears N55 W, 52 lks. dist., mkd. T30N R29W S2 B.T.

1972 B.L.M. remonumentation by Joseph E. French: "At the corner point set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown.



from which:

book No. .

A larch, 12 ins. diam., bears N70 1/2 E, 18 1ks. dist., mkd. T30N R29W S1 B.T. A larch, 6 ins. diam., bears N34 $1/2^{\circ}$ W, 51 lks. dist., mkd. T30N R29W S2 B.T.


Buried the original stone alongside the iron post.

II. Found a 2 1/2 ins. diam., B.L.M. brass cap 6 ins. above the ground, mkd. as shown, from which:

A pine, 20 ins. diam., bears S84 $1/2^{\circ}$ w. 33.3 ft. dist. visible scribing, S11 29N A larch, 10 ins. diam., bears S44 E. 43.8 ft. dist. healed face. A larch, 14 ins. diam., bears N70 $1/2^{\circ}$ E, 12.5 ft. dist., visible scribe "T". A larch, 10 ins. diam., bears N34 $1/2^{\circ}$ w, 34.1 ft. dist., healed face.

III. Set a 6 ft. galvanized steel guard post with Land Survey Monument and Property Boundry decals , East 3 ft. Painted a red band around each bearing tree and attached "Land Survey Monument" and "Bearing Tree" signs.

Magnetic Declination: 20 East.

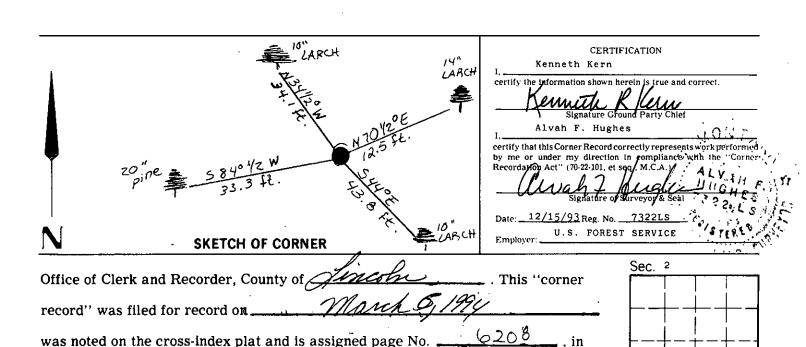

Cross Index No.

umm

30 N

29 W

County Official