CERTIFIED CORNER RECORDATION


Corner S 1/4 Sec. 8 T. 30N R. 29W P.M., MT Lincoln County

I. <u>1898 G.L.O. orig. record by Paul S. A. Bickel:</u> Set a slate stone and two bearing trees.

1965 B.L.M. Remonumentation record by Joseph E. French: The 1/4 sec. cor. of secs. 8 & 17, monumented with a slate stone, 14 x 10 x 6 ins., set 9 ins. in the ground, mkd. "1/4" on the N. face, from which the remains of the original bearing trees:

A pine, 20 ins. diam., bears \$23°20'E, 57 lks. dist., mkd. "1/4 \$17 BT". A pine stump, 26 ins. diam., bears \$N74°'W, 30 lks. dist., with no visible scribing.

At the corner point, set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd. as shown:



from which a new bearing tree:

A pine, 11 ins. diam., bears N79°'W, 30 lks. dist., mkd. "1/4 S8 BT".

Bury the original stone alongside the iron post.

II. Found a 2 1/2 in. diam. iron pipe with a 3 1/4 in. diam. brass cap, firmly set, mkd. as shown above, from which:


A pine, 23 ins. diam., bears S23°E, 37.6 ft. (57 lks.) dist., mkd. with visible scribing. A rotten stump, 26 ins. diam., bears N74°'W, 19.8 ft. (30 lks.) dist., with no visible scribing. A pine, 11 ins. diam., bears N79°'W, 19.8 ft. (30 lks.) dist., mkd. with visible scribing.

III. Established one new bearing tree:


A fir, 19 ins. diam., bears N60°W, 59.9 ft. dist., mkd. "1/4 S8 BT".

Painted bearing trees and attached Land Survey Monument and Bearing Tree signs.

Magnetic Declination: 20° East.

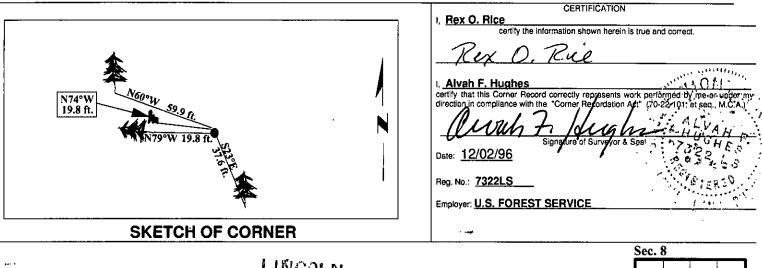

Office of Clerk and Recorder, County of LINCOLN . This "corner record" was filed for record on FEB 3,1997 and was noted on the cross-index plat and is assigned page No. 9/24, in book No. ______ CORAL M.C. MININGS County Official



Cross Index No.

J-7

. 30N ^{R.} 29W