CERTIFIED CORNER RECORDATION

Corner Sec. Cor. Sec. 7, 8, 17 T. 30N R. 29W P.M., MT Lincoln County &18

I. 1898 G.L.O. original record by Paul S. A. Bickel: Set a stone and 4 bearing trees.


1964 Corps of Engineers: Set a 1 1/2 in. diam. iron pipe with a 2 in. diam. brass cap. No record found in Lincoln County Courthouse.

1965 B.L.M. remonumentation record by Duane C. Lindenberg: The cor. of secs. 7, 8, 17,&18, monumented with an iron post, 2 ins. diam., 6 ins. above the ground, with brass cap, and witnessed by the remains of the original bearing trees:

A stump hole, bears N26 1/2°E, 22 lks. dist., with fallen log, no visible marks. (G.L.O. record) A stump hole, 24 ins. diam., bears S53 1/2°E, 95 lks. dist., with fallen log, mkd. "T30N R29W S17 BT". (G.L.O. record)

A snag, 28 ins. diam., bears S51°W, 117 lks. dist., mkd. "S18 BT". (G.L.O. record) A stump, 20 ins. diam., bears N21 1/2°W, 62 lks. dist., mkd. "BT". (G.L.O. record) Established four new bearing trees.

II. Found a 1 1/2 in. iron pipe, protruding 8 ins. above the ground, firmly set, with a 2 in. diam. brass cap mkd. as shown:



from which:

A fir, 16 ins. diam., bears N41°E, 33.4 ft. 50 dist., mkd. with a healed face. (B.L.M.)

A pine, 14 ins. diam., bears S4°E, 41.4 ft. dist., mkd. with a healed face. (B.L.M. rec.-S7 1/2°E)

A pine, 15 ins. diam., bears S44°W, 61.4 ft. dist., mkd. with a healed face. (B.L.M.)


A snag, 28 ins. diam., bears S51°W, 77.2 ft. (117 lks.) dist., mkd. with visible scribing. (G.L.O.)

A fir, 15 ins. diam., bears N73°W, 26.0 ft. dist., mkd. with a healed face. (B.L.M. record N77 1/2°W)

A rotten stump, bears N21°W, 40.9 ft. (62 lks.) dist., no visible scribing. (G.L.O.)

III. Painted bearing trees and attached Land Survey Monument and Bearing Tree signs.

Magnetic Declination: 20° East.

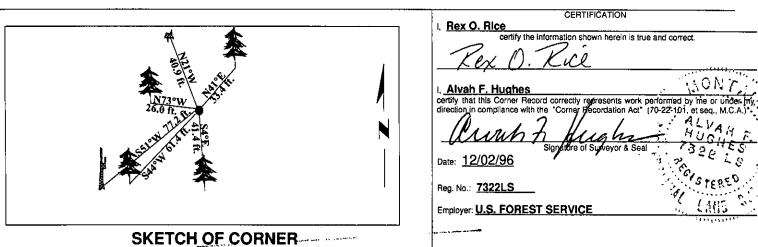

Cross Index No. J-5 T. 30N R. 29W P.M., F.