## CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

T30N R30W Montana Principal Meridian G.L.O. notes book 3420 page 38 has original stone and 2 bearing trees. Found the 2 bearing trees and a BLM brass cap marked \* T30N R30W. Have no record of the brass cap.

38

Record: 18" tamarack, bearing N46°40'W, 42 lks., marked ½ S5 BT Found: 21" stump bearing N49°W, 42 lks., with visible scribe "BT"

Record: 8" fir bearing S21°E, 30 lks., marked \( \frac{1}{4} \) IS BT Found: 13" fir bearing S19\( \frac{1}{6} \) E, 30 lks., with only-visible scribe being the "8" CONTINUED ON REVERSE SIDE

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work: May 74

No added monumentation

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY. (MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

See reverse side

ANT A ONTAN 4 JOHN C **ERICKSON** 3979 S EGISTERED SURVE anni properties

Surveyor's Seal

James R. Staples

certify that the information shown herein is true and correct

lama . K. Staples Signature of Ground Party Chief

JOHN C. ERICKSON

certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this

recordation form and approve the same.


Eruban Signature of Surveyor

DIAGRAM OF CORNER:

N. T3ON R3OW

= Corner recorded on the sheet

Office of Clerk and Recorder, County of ... This "corner record" was filed for record on the 26 day of 7001 ..... 19.57 was noted on the cross-index plat and is assigned page No. 4010, in book No..... 30 N

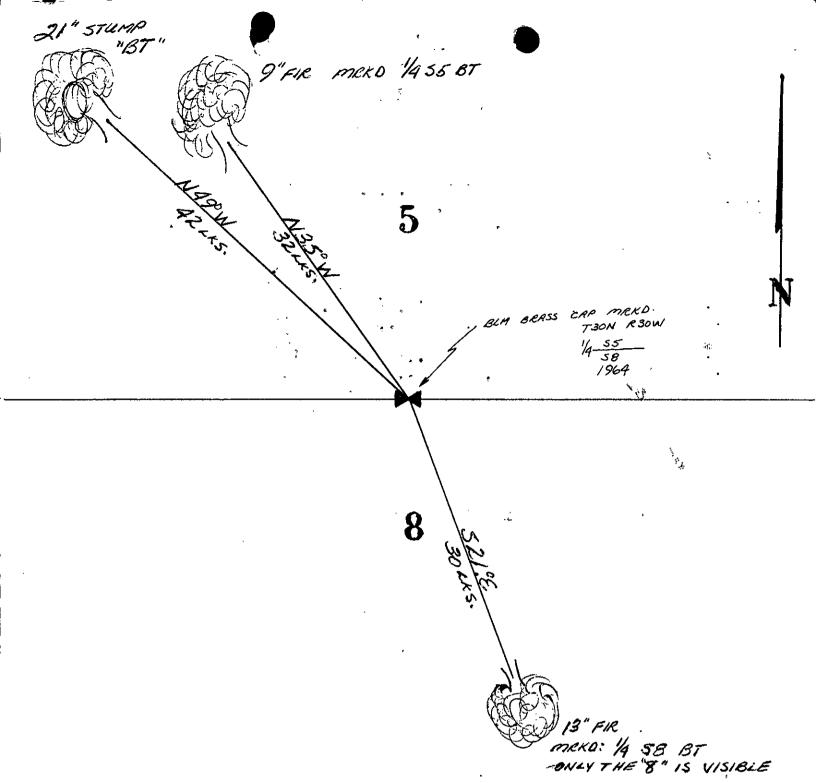

Description of corner evidence and original record continued

Found: 9" fir bearing N35°W, 32 lks., marked  $\frac{1}{4}$  S5 BT NO RECORD