CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

T30N R29W Montana Principal Meridian G.L.O. notes book 8958 page 144 has 30" iron post, 2½" in diameter, 26" in the ground with brass cap marked T30N Found the brass cap in good condition and undisturbed.

R2 9W

Record: 27" pine bearing N8°10'E, 320 lks., marked T30N R29W S7 BT Bearing tree still 27" in diameter, 320 lks., bearing N17°E

Record: 30" pine bearing S49°20'E, 93 lks., marked T30N R29W S18 BT Found: Bearing tree alive and still 30" in diameter

CONTINUED ON REVERSE SIDE
DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work flene 14

No added monumentation

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY. (MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

~See reverse side

Surveyor's Seal

JOHN C. **ERICKSON** 3979 S PEGISTERED SURVE James R. Staples

I, certify that the information shown herein is true and correct.

> James R. Staples Signature of Ground Party Chief

JOHN C. ERICKSON


certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

> Company Signature of Surveyor

> > 39795 Registration Number

DIAGRAM OF CORNER: 730N


R30W R29W



= Corner recorded on the sheet

Office of Clerk and Recorder, County of ... This "corner record" was filed for record on the 28 day of Max .. 1989, was noted on the cross-index plat and is assigned page No. 4032, in book No.....

30N R

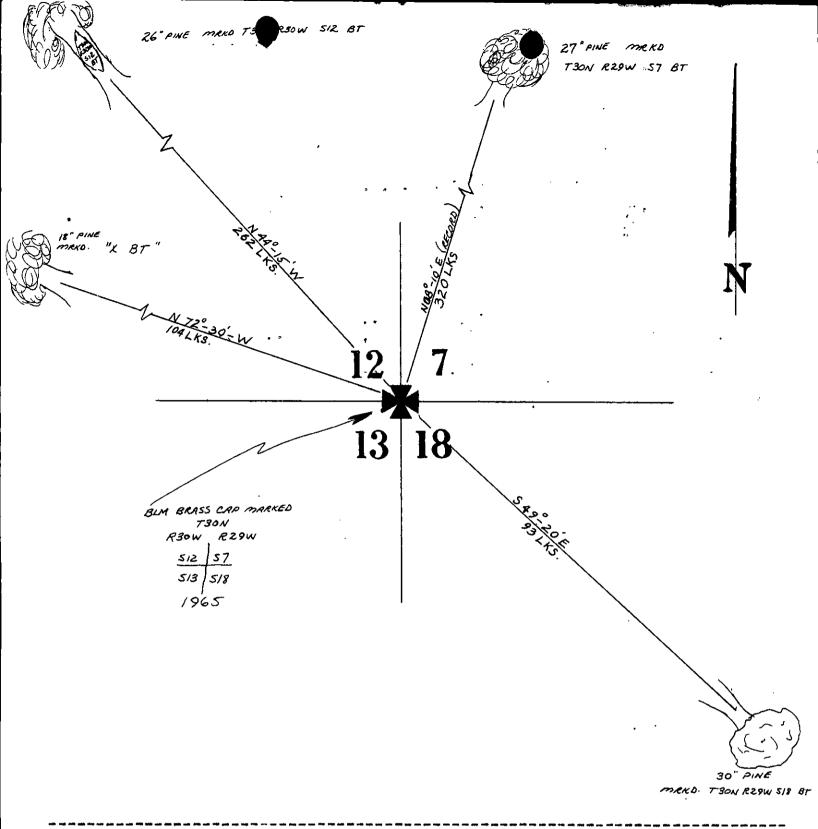

Description of evidence and original record continued from page 1

Record: 26" pine bearing N44½°W, 262 lks., marked T30N R30W S12 BT Found: Bearing tree alive and still 26" in diameter

Record: 12" pine bearing N72½°W, 104 lks., marked "x BT" Found: Bearing tree alive and presently 18" in diameter