## CERTIFIED LAND CORNER RECORDATION

T30N

T31N R30W

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

T31N R30W Montana Principal Meridian G.L.O. notes book 8958 page 195 has 2½" pipe 30" long 26" in the ground with a brass cap marked T31N R30W

S33 | 334

Found brass cap in good condition and undisturbed.

T30N 1965

Record: 17" pine bearing S64°E, 181 lks., marked T30N R30W S3 BT Found: Bearing tree alive and still growing and presently 27" in

diameter. Measured distance 164 1ks.

CONTINUED ON REVERSE SIDE

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

No added manumentation ...

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY.

(MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

JSee reverse side....

Surveyor's Seal

JOHN C. **ERICKSON** 3979 S SURVEYOR MINING

James R. Staples certify that the information shown herein is true and correct.

> (ames) Signature of Ground Party Chief

JOHN C. ERICKSON

certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Signature of Surveyor

3979 5 Registration Number

= Corner recorded on the sheet

DIAGRAM OF CORNER:

R30W

T3W


Office of Clerk and Recorder, County of ....

This "corner record" was filed for record on the 28 day of Mu

was noted on the cross-index plat and is

assigned page No. 4042, in book No.....

A13 T 30N R 30W

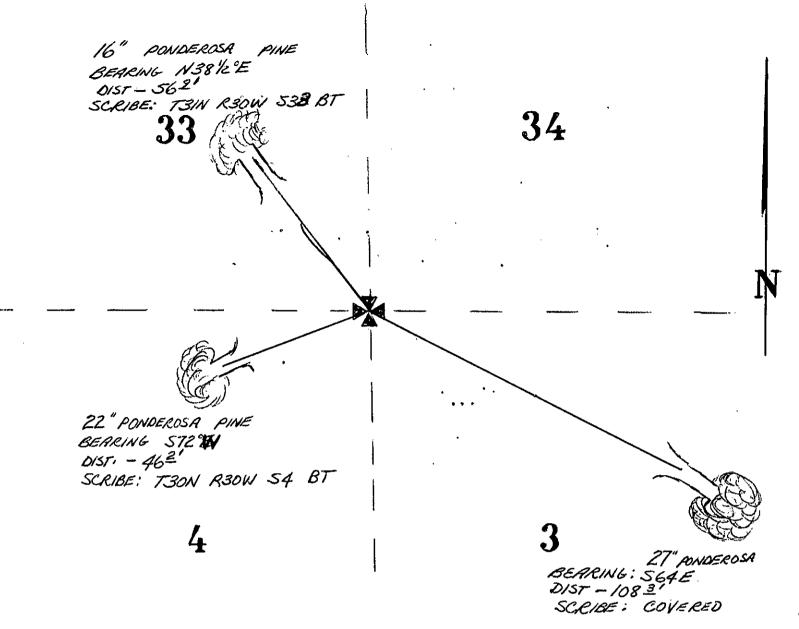

Record: 19" pine bearing S72°W, 70 lks., marked T30N R30W S4 BT Found: Bearing alive and still growing and presently 22" in diameter

Record; 12" fir gearing N38½°W, 86 lks., marked T31N R30W S33 BT Found: Bearing tree alive and still growing and presently 16" in diameter