

## INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner NW 1/16 Section 4 T. 30 N. R. 30 W. P.M.M. Lincoln County

I. 1975 Certified Corner Recordation No. 382 and P.F. 2639A, by J. Ninneman, 534ES:

Set a 1/2" x 24" Steel Rod with cap stamped J.N. 534 E.S.

A 12 in. Fir bears N 63° 30' W 9.9 feet.

A 8 in. Cottonwood bears S 44° E 3.4 feet.

Both scribed NW 1/16 and Posted.

II. Found a 5/8 in. diam. rebar, 2 ins. above the ground, with a 1" diam. cap marked JN 534ES, from which:

A cottonwood, 9 ins. diam., bears S 45° 50' E, 2.7 ft. dist., with scribing visible NW 1/16.

A douglas fir, 10 ins. diam., bears N 66° 13' W, 9.6 ft. dist., with overgrown blaze.

III. As a result of Mr. Ninneman's acceptance of different corner positions for the SW and NW section corners for section 4, I find the Ninneman corner rebar bears N 86° 12' W, 7.1 ft. dist. from my calculated position. Therefore, I do not accept the Ninneman rebar as the true NW 1/16 corner position. At the new calculated position, I set a 3/4 in. diam. x 30 ins. long aluminum rod, with 3 1/4 in. diam. U.S.D.A. aluminum cap stamped as shown.

NW 1/16 S4  
7322-S  
1989


from which

A larch, 7 ins. diam., bears N 46° 52' E, 26.8 ft. dist., scribed NW 1/16 S4 BT (New BT).

A douglas fir, 10 ins. diam., bears N 75° 03' W, 16.4 ft. dist., with overgrown blaze (Ninneman's BT).

Painted a red band around each bearing tree and attached Survey Monument and Bearing Tree signs.

Set a 6 ft. galvanized steel guard post with Land Survey Marker decal, 2 ft. West of the new monument.

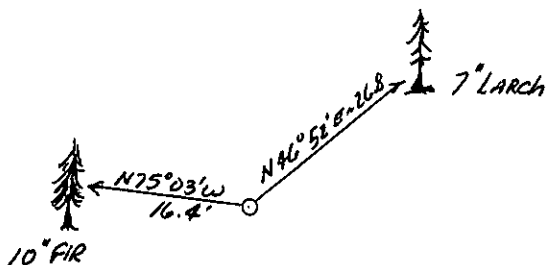

SKETCH OF CORNER

## CERTIFICATION

I, Gary Crismon

certify the information shown herein is true and correct.

Gary Crismon  
Signature Ground Party Chief

I, Alvah F. Hughes

certify that this Corner Record correctly represents and is performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Alvah F. Hughes  
Signature of Surveyor

Date: 12/26/89

Reg. No. 7322-S

Employer: U.S. FOREST SERVICE


Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on Dec 29, 1989

was noted on the cross-index plat and is assigned page No. 4177, in

book No. \_\_\_\_\_

Janet B. Sugil by Bill Buehler  
County Official

Sec. 4

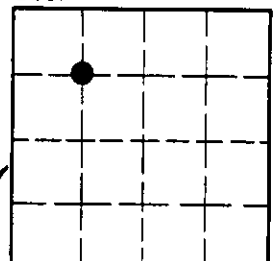

• - corner this sheet

Cross Index No. B-10 T. 30N R. 30W P.M.M.