

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner SW Corner Section 4 T. 30N. R. 30W. P.M.M. Lincoln County

- I. 1898 Original GLO record by P. Bickel: Set a limestone, 14 x 10 x 6 ins., 9 ins. in the ground, for Cor. of Secs. 4, 5, 8 & 9 marked with 5 notches on S. and 4 notches on E. edges and marked 4 bearing trees.

1903 Retracement and Completion survey, GLO record by Fessenden: Tie to SW Section 4.

1975 Certified Corner Recordation No. 382, by J. Ninneman, Reg. No. 534ES: Corner falls in Kootenai River.

1979 Remonumentation, Certified Land Corner Recordation by S. Staab, Reg. No. 5619S: Found 3/4 inch iron pipe at corner location (origin unknown), from which:

A 48" broken Tamarack bears N84 1/2° E 114.5' visible scribing (origin unknown)

A 22" Fir bears S21° W 106.8' visible scribing (origin unknown)

A 24" Fir bears N66° W, 163.0 visible scribing (origin unknown)

Set a 2 1/2" Aluminum pipe with cap marked:

This position was verified by ties to the 4 adjacent quarter corners and by ties to the railroad tracks as found on a map located in the offices of Lawrence Sverdrup, Attorney at Law, Libby, Montana. Buried 3/4" iron pipe alongside monument.

T30N R30W

S5|S4

S8|S9

5619S

1979

1989 Certified Land Corner Recordation by J. Erickson, No. 3979S: Note: This corner recordation was prepared in 1974, however was not filed until 1989, per COE records, Seattle, Wash.

Found no indication of original trees or corner. Reset corner by double proportion method. Set Corps of Engineers Brass cap and 4 bearing trees.

T30N R30W

S5|S4

S8|S9

1974

from which:

A 36" fir bearing N84 1/2° E, 172 lks., marked T30N R30W S4 BT.

A 30" tamarack bearing S75 1/2° E, 219 lks., marked T30N R30W S9 BT.

A 15" fir bearing S21° W, 160 lks., marked T30N R30W S8 BT.

A 12" fir bearing N66° W 245 lks., marked T30N R30W S5 BT.


- II. Found a USPS aluminum monument with 3 1/4" aluminum cap, marked as shown above, 8 ins. above the ground. It appears that the COE brass cap set by J. Erickson was lost, although the rod was still in place, when Mr. Staab tied this corner. Apparently Staab was not aware that this corner had been double proportioned by J. Erickson in 1974 as the Erickson corner information had not been filed at that time. From the corner:

A fir snag, 28 ins. diam., bears N84° E, 114.5 ft. (173 lks.) dist., visible scribe R3 S4 BT.

A larch, 31 ins. diam., bears S75° E, 146.1 ft. (221 lks.) dist., visible scribe T30N R30W S9 BT.

A fir, 23 ins. diam., bears S20° W, 107.1 ft. (162 lks.) dist., with pitched over scribe.

A fir, 25 ins. diam., bears N68° W, 163 ft. (247 lks.) dist., visible scribe 3 W S B.

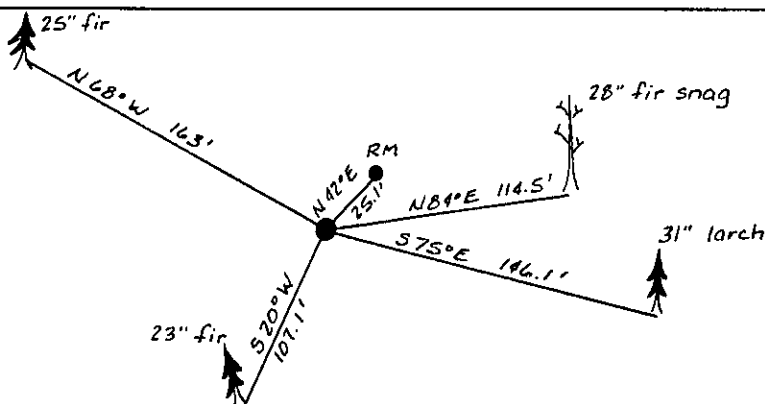

SKETCH OF CORNER

CERTIFICATION

I, Robbin Glazier

certify the information shown herein is true and correct.

Signature Ground Party Chief

Alvah F. Hughes

I, Alvah F. Hughes, certify that this Corner Record correctly represents the location of the corner by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101 et seq., M.T.S.A.)

Alvah F. Hughes
Signature of Surveyor & Seal

Date: 12/26/89 Reg. No. 7322S

Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on Dec. 29, 1989


was noted on the cross-index plat and is assigned page No. 4178, in

book No. _____

County Official Janet A. Seigel by Bill Seigel


Cross Index No. E-9 T. 30N R. 30W P.M.M.

Sec. 4



• - corner this sheet

III Finding no suitable trees in section 4, I set a reference monument, a 3/4 ins. x 30 ins. aluminum rod with a 3 1/4 ins. diam. U.S.D.A. aluminum cap, marked as shown below, 26 ins. in the ground. From the section corner, the reference monument bears N 42° E, 25.1 ft. dist. I placed a collar of stone, 2 ft. diam., around the RM. I set a 6 ft. galvanized steel guard post with Land Survey Marker decal, 3 ft. NE of the RM.



Painted red band around each bearing tree and attached Survey Monument and Bearing Tree signs. Utilize 19° E. declination. This corner is approximately 130 ft. east of BN railroad track; 0.15 miles southeast along the tracks from the Ripley Siding sign.

