

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corner.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography etc., position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

**CERTIFIED CORNER RECORDATION**

Corner 1/4 28/27 T. 30N R. 30W P.M.M. Lincoln County

Record of Original Corner Date of Survey 1984  
 Surveyor: Messenger and Lyman


40.00 Chs Set a slate stone 12x8x8 ins. 8 ins. in the ground for 1/4 Sec. cor. marked 1/4 on W. face, from which:  
 A fir 8 ins. dia. bears N30°W 6 lks (3.96 ft) dist. marked 1/4S28BT.  
 A tamarack 6 ins. dia. bears S70°1/4 E 29 lks. (19.14 ft) dist. marked 1/4S27BT.

Description of Corner Evidence Found

Found a 12x8x9 ins. stone firmly in the ground with 1/4 marked on the west face from which:  
 A 14" douglas fir stump with ax marks and rotten log with remnants of blazing at record bearing and distance for BT in NW quadrant.  
 An 8" rotten larch stump with unreadable scribing bears S63°E 18.6 ft distant.

Description of Monument Set

Set a standard Forest Service aluminum monument 26" in the ground, from which:  
 A 7 1/2" douglas fir bears N47°E 31.3 ft. dis. scribed 1/4 S27BT  
 A 6" douglas fir bears S70°W 50.2 ft dis. scribed 1/4 S28BT  
 Buried stone to S. of monument. Bearing trees were signed and blazes painted red. Placed a 6 ft. steel fence post with Land Survey Monument decal attached by corner. Corner falls in flat open clearing in moderately thick woods.

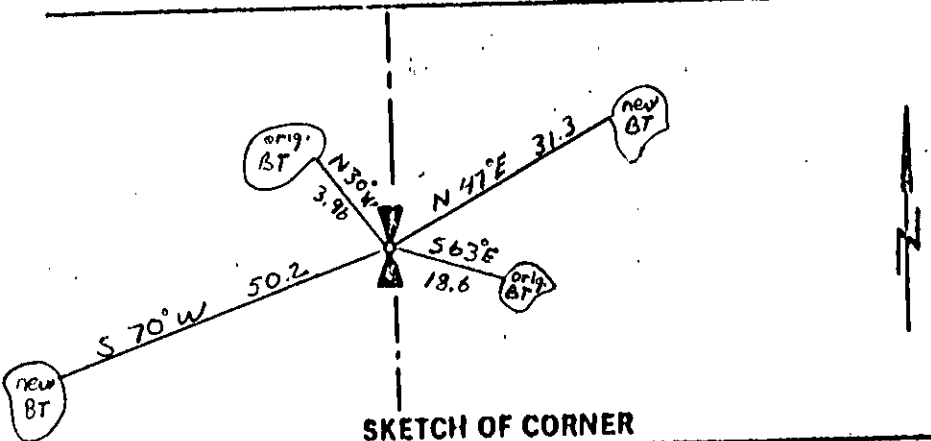

**CERTIFICATION**

I, James R. Staples  
 certify the information shown herein to be true and correct.  
*James R. Staples*  
 Signature Ground Party Chief

I, James R. Staples  
 certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-21-101, et seq., M.D.A.)  
*James R. Staples*  
 Signature of Surveyor & Seal

Date: 9/20/90 Reg. No. 9958LS  
 Employer: J.R.S. & Associates

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the Oct 31 day of 1990 was noted on the cross-index plat and is assigned page No. 4285, in book No. \_\_\_\_\_  
*Grant H. Siegel by Bill Busch*  
 County Official

Sec. 27
