

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

**CERTIFIED CORNER RECORDATION**

Corner CW 1/16 of Sec. 19 T. 30 N. R. 30 W. P.M.M. Lincoln County


I. 1979 corner recordation by Jack H. Ninneman: Set 5/8 " x 24" steel rod with yellow cap stamped JHN 4661S, from which

A 18 " douglas fir, bears  $S54^{\circ} 13' W$ , 17.20 ft., mkd. CW 1/16 Cor. T30N R30W S19.

II. Found a 5/8 in. diam. rebar with yellow plastic cap mkd. JHN 4661S. from which

A douglas fir, 22 ins. diam., bears  $S56^{\circ} W$ , 16.8 ft. dist., mkd. CW 1/16.

III. At found JHN rebar, I set a 3/4 in. diam., 30 ins. long alum. rod, 24 ins. in the ground with alum. cap mkd. as shown:





Established one new bearing tree

A douglas fir, 9 ins. diam., bears  $N9^{\circ} W$ , 15.1 ft. dist., mkd. CW 1/16 S19 BT.

Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs.

Set a 6 ft. galvanized steel guard post with Land Survey Marker and Property Boundary decals, West, 3 ft.

Magnetic Declination:  $20^{\circ}$  East.

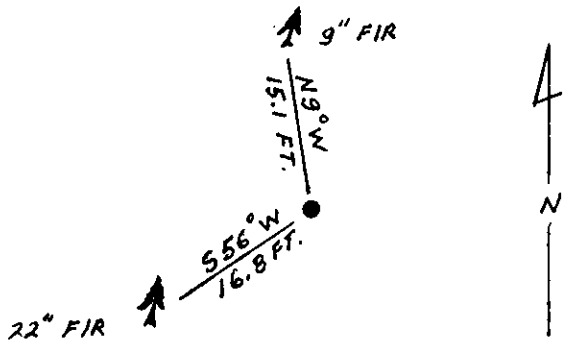

SKETCH OF CORNER

CERTIFICATION

I, Kevin A. Todd  
certify the information shown herein is true and correct.

Kevin A. Todd  
Signature Ground Party Chief

I, Ronald A. Pearson  
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)


Ronald A. Pearson  
Signature of Surveyor & Seal

Date: 11/6/91 Reg. No. 9008 LS

Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on Dec 18, 1991 was noted on the cross-index plat and is assigned page No. 4610, in book No. \_\_\_\_\_

Coral M. Cummings by Bill Kuehler  
County Official



P-2 30 N 30 W  
Cross Index No. \_\_\_\_\_ T. \_\_\_\_\_ R. \_\_\_\_\_ P.M.M.

• - corner this sheet