

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner Amended N 1/16 W Sec. 4 T. 30 N. R. 30 W. P.M.M. Lincoln County

- I. 1975 Corner Recordation by J. Ninneman, 534 ES.
1989 Corner Recordation by A. Hughes, 7322 LS, Page 4182
- II. Found a 3/4 in. diam. aluminum rod, flush with the ground, with a 3 1/4 ins. diam. U.S.D.A. brass cap, marked as shown:




from which:

- A Douglas fir, 12 ins. diam., bears N29°W, 52.9 ft. dist., mkd. N1/16 S5 BT.
A Douglas fir, 14 ins. diam., bears S60°E, 81.7 ft. dist., mkd. N1/16 S4 BT.

- III. I amend the position of this corner as the NW Section Corner Section 4 was erroneously double proportioned. See Amended Certificate of Survey for Section 4. The new corner position bears N00°21'04"E, 6.0 ft. from the 1989 Corner position. I use the same bearing trees however bearings and distances are changed. I stamp "93" on the Aluminum cap, from which:

- A Douglas fir, 14 ins. diam., bears S54°E, 84.8 ft. dist., mkd. N1/16 S4 BT.
A Douglas fir, 12 ins. diam., bears N34°W, 47.7 ft. dist., mkd. N1/16 S5 BT.

I repainted red bands around the bearing trees, with Land Survey Monument and Bearing Tree signs attached. No Guard post set.
Magnetic Declination: 20° East

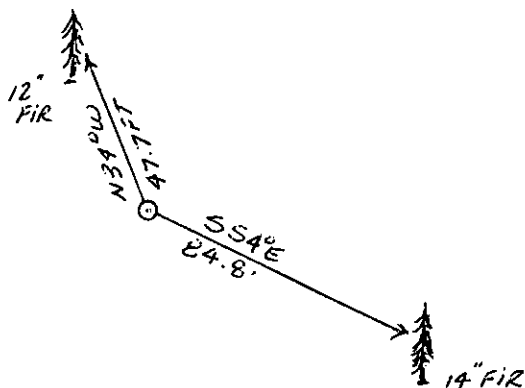

SKETCH OF CORNER

CERTIFICATION

Thomas M. Hommel

I, _____
certify the information shown herein is true and correct.

Thomas M. Hommel
Signature Ground Party Chief

Alvah F. Hughes


I, _____
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Alvah F. Hughes
Signature of Surveyor & Seal

Date: 7/07/93 Reg. No. 73221

Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on July, 23, 1993 was noted on the cross-index plat and is assigned page No. 5340, in book No. _____
Coral M. Cummings By DB
County Official



• - corner this sheet

Cross Index No. B-9 T. 30 N R. 30 W PMM