

CERTIFIED CORNER RECORDATION

CORNER N1/16 T. 30 N., R. 31 W., P.M.M. LINCOLN COUNTY

RECORD:

Per C.O.S. 291, 5/8 rebar capped with a white plastic cap stamped MDL
4232-S (see diagram below)
From which

A 1 inch galvanized pipe bears N12°38'07"E , 9.60 ft. dist.

FOUND EVIDENCE:

5/8 rebar capped with a white plastic cap stamped MDL 4232-S
From which

A 1 inch galvanized pipe bears N12E , 9.50 ft. dist.


PERPETUATION:

Set 6 foot Steel Post which bears N35°E 5.0 ft. dist.

Set 6 foot Steel Post which bears N57°E 13.4 ft. dist.

Attached bearing tree signs to all posts.

MAGNETIC DECLINATION: 18° E

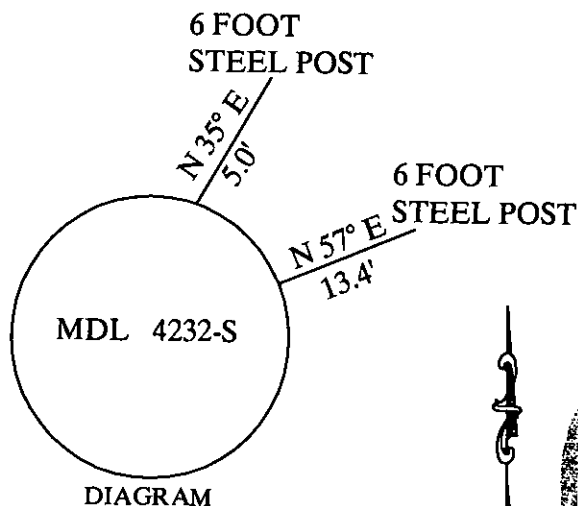

CERTIFICATION

I, Alan Williams
Certify the information shown herein is true and correct
Signature of Ground Party Chief

I, Don E. Davis

certify that this Corner Record correctly represents work
performed by me or under my direction in compliance with the
"Corner Recordation act"
(70-22401, et seq. M.C.A.)

Signature of Surveyor & Seal


Date: 6/23/08 Reg. No. 9975-S

Employer: DAVIS SURVEYING, INC.

SKETCH OF CORNER

Office of Clerk and Recorder, County of _____
This "CO: 212333 BOOK: CCR CC&R'S PAGE: 11220 Pages: 1
was note STATE OF MONTANA LINCOLN COUNTY
No. RECORDED: 06/23/2008 3:30 KOI: CC&R'S
In book TAMMY D. LAUER CLERK AND RECORDER
FEE: \$0.00 BY: Leanne Simpson Deputy
TO: DAVIS SURVEYING, INC. P.O. BOX 896, TROY, MONTANA 59935

SECTION



Cross Index No. N1/16 T.30 N., R. 31 W., P.M.M.

THIS CORNER