

BOOTHMAN #591

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 1/4 Cor. S35 S2 T. 30N R. 31W P.M.M. Lincoln County

Original Record - G.L.O.

At 40 chains set a post 3' long, 3" square from which  
 A Pine 48 ins. diam., bears N64°15'E 220 lks.  
 A Pine 24 ins. diam., bears S2°15'E 111 lks.

Subsequent Record

March 1967 - Set a steel pin in fence line, no witnesses, by Ninneman per Corner Record Book 1, Page 91.  
 November 1967 - Plat 1436 by Robert Burdick, shows JT Shaw 1/4 Corner in place.  
 July 1968 - Plat PF No. 2487 Northwood Manor Subdivision shows 1/4 Corner set by single proportion JT Shaw.


Evidence Found

A 1 inch rebar about 6 inches under the pavement, bears S55°58'51"E from the true 1/4 Corner position.

I compute the true position of the 1/4 Corner from which reference monuments:

- A 1/2 inch rebar capped JNS34ES bears S0°48'40"E 67.95 feet.
- A 1 inch rebar, 6 inches under pavement, bears S55°58'51"E 1.31 feet.
- A PK nail, 1/2 inch under pavement, bears S83°11'53"E 10.87 feet.
- A 5/8 inch rebar capped MDL 4232-S bears N89°36'29"E 60.00 feet.

SEE SKETCH ON REVERSE

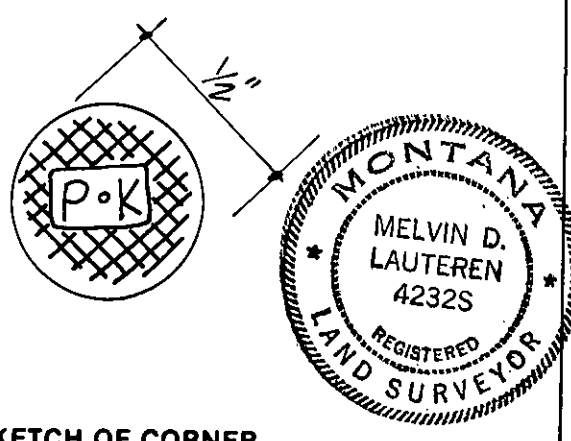


SKETCH OF CORNER

CERTIFICATION  
 I, L.A. DUEZAL  
 certify the information shown herein is true and correct.  
L.A. DUEZAL  
 Signature of Ground Party Chief  
 I, MELVIN D. LAUTEREN  
 certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, MCA).  
Melvin D. Lauteren  
 Signature of Surveyor & Seal  
 Date: 12/2/81 Reg. No. 4232-S  
 Employer: KOOTENAI ENGINEERING INC.

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the 8th day of Dec 1981, was noted on the cross-index plat and is assigned page No. 1431, in book No. 1.  
Glenn L. Vaughn, Deputy  
 County Official

Cross Index No. A-19 T. 30N R. 31W P.M.M.



• corner this sheet

