

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography key, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner CY4 S-22T. 30N R. R31W P.M.M. LINCOLN

County

Date of Work: October 15, 1982

I. 1973 BLM Record, set an Iron post, 28 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, in a collar of Stone, with Brass Cap MKD. T30N. R31W.

$S,22$
 01
 04
1973

From which:

1. A Fir, 8 ins. diam., bears S. $37\frac{1}{2}^{\circ}$ E., 31 LKS dist., MKD. XBT
2. A Fir, 7 ins. diam., bears S. $81\frac{1}{2}^{\circ}$ W., 29 LKS dist., MKD. $C\frac{1}{4}$ S.22 BT.



II. 1982, found $2\frac{1}{2}$ ins. Iron post with brass cap. Per BLM Record.

1. A 9 ins. Fir bears (S.E. 31 LKS T30N. R31W. Sec.22 BLM9/73)
2. A 9 ins. Fir bears (S.W. 29 LKS T30N. R31W. Sec.22 BLM 9/73)

III. N. 26° W. 12.1 to corner from location Poster placed this Survey.

S. 26° E. to Attn: sign placed this survey.


I painted RED bands around bearing trees about head high, and painted the rock mound.

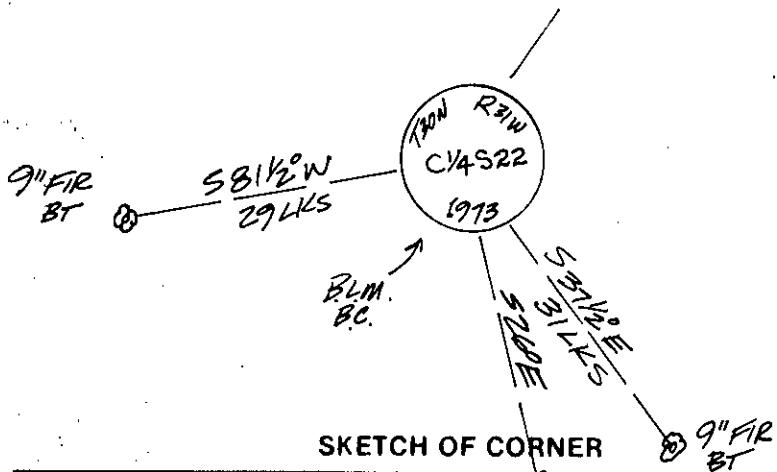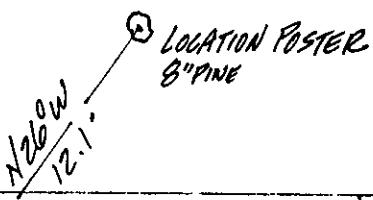

Office of Clerk and Recorder, County of LINCOLN. This "corner record"

was filed for record on the 17th day of Nov. 1982, was noted on the cross-index plat and is assigned page No. 2062, in book No. Eleanor L. Vaughn by Betty L. Conces

County Official deputy

Sec. 22

1960
1961
1962
1963
1964