

## INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners
3. Description of monument and accessories set to perpetuate the corner position
4. Sketch of corner, show all pertinent data which can best be shown in a sketch, example, corner marking, topography key, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner E 1/16 28 33 T. 30N R. 31W P.M.M. LINCOLN County

Date of Work: October 15, 1982


I. 1973 BLM Record; Set an Iron post, 28 ins. long,  $2\frac{1}{2}$  ins. diam., 20 ins. in the ground, in a collar of Stone, with Brass cap MKD: T30N. R31W.  
 E.1/16 S.28  
 S.33  
 1973

From which:

1. A Fir, 6 ins. diam., bears N.  $70^\circ$  E., 84 LKS dist., MKD T30N. R31 W. E.1/16 S. 28 BT
2. A Pine, 9 ins. diam., bears N.  $75^\circ$  W., 4 LKS dist., MKD T30N. R31 W. E. 1/16 S. 28 BT


II. 1982, Found,  $2\frac{1}{2}$  ins. diam., Iron post with Brass cap. Per BLM Record:  
 1. A 7 ins. Fir bears (N $70^\circ$  E. 84 LKS BLM 8/73)  
 2. A 8 ins. Pine bears (N $75^\circ$  W. 7 LKS BLM 8/73)

III. I painted RED bands around bearing trees about head high. I painted the corner monument and rock mound, and hung a location poster on the 8 ins. Pine BT.

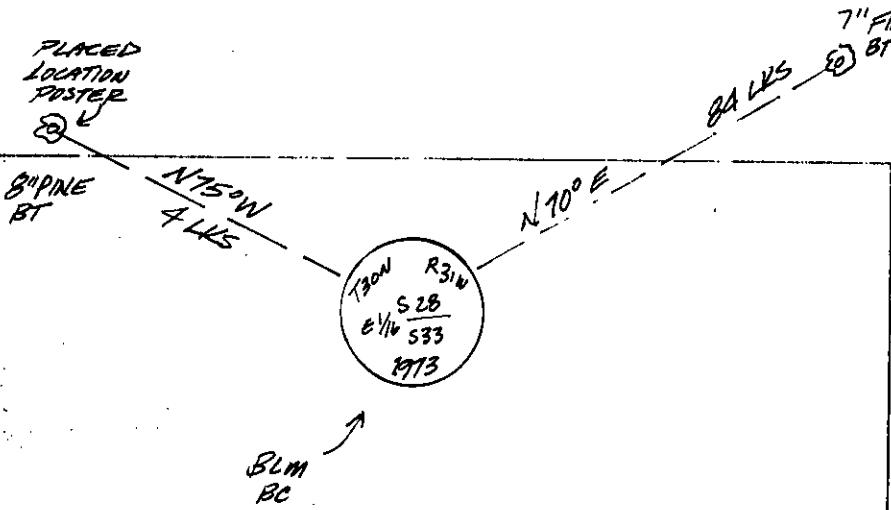 <p><b>PLACED LOCATION POSTER</b></p> <p><b>8" PINE BT</b></p> <p><b>N75°W 4 LKS</b></p> <p><b>N10°E</b></p> <p><b>7" FIR BT</b></p> <p><b>BLM BC</b></p> <p><b>SKEETCH OF CORNER</b></p>	<p style="text-align: center;"><b>CERTIFICATION</b></p> <p><b>GERALD E. BUNTON</b>  <i>Gerald Bunton</i>    Signature Ground Party Chief</p> <p>I certify the information shown herein is true and correct.</p> <p><b>MEWIN D. LAUTEREN</b>  <i>Mewin D. Lauteren</i>    Signature Surveyor</p> <p>I certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Rule" (70-22-104 M.L.S.C.A.)</p> <p>Date: <b>10-15-82</b> Reg. No. <b>4232-SUPRI</b>    Employer: <b>KASTENAI ENGINEERING INC.</b></p> <p><i>Montana</i></p>
--	--

Office of Clerk and Recorder, County of LINCOLN. This "corner record" was filed for record on the 17th day of Nov. 1982, was noted on the cross-index plat and is assigned page No. 2065, in book No. Eleanor L. Vaughn by Betty L. Conner  
 County Official Deputy

Sec. 33



Cross Index No. **V-12** T. **30** R. **31** P.M.M.

\* Corner this sheet

