


1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

### CERTIFIED CORNER RECORDATION

Corner SE 1/4 SECTION 26 T. 30 N R. 31 W P.M.M. LINCOLN County

- ① ~~U CORNER RECORD~~ ~~BOOK-1 PAGE 525 SET 5/8" X 24" STEEL ROD WITH CAP STAMPED: JHN 4661-S. FALLS IN CENTER OF PRIVATE RD, NO. BT'S OR LOCATION POSTER SET.~~
- ② FOUND 5/8" RE-BAR (NO CAP).
- ③ CAPPED FOUND RE-BAR WITH G.E.B 4974-S PLASCAP, FROM WHICH: A 7 INCH LODGEPOLE PINE SCRIBED 1/16 B.T. BEARS N 18° E, 24.8 FEET. AN 8 INCH DIAMETER FIR BEARS N 70° W, 52.5 FEET, SCRIBED 1/16 B.T.

C.O.S. NO \_\_\_\_\_

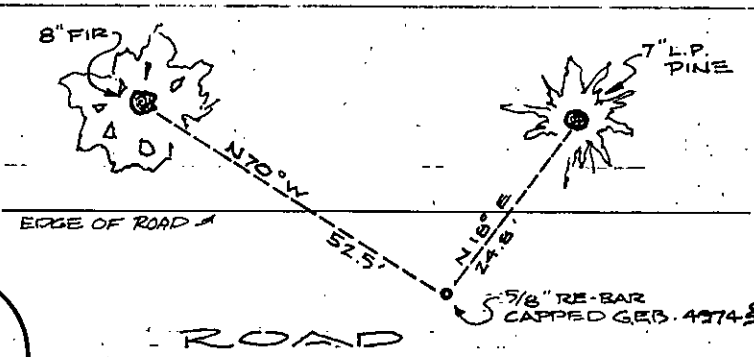

G.E.B.  
4974-S

1/4 IN. P.V.C. CAP SKETCH OF CORNER

CERTIFICATION

I, GERALD E. BLUNTON

*[Signature]*  
Signature of County Clerk


I, GERALD E. BLUNTON

*[Signature]*  
Signature of Surveyor General

Date: 1/9/83 Reg. No. 4974-S

Employer: BLUNTON'S TECHNICAL SERVICES

Office of Clerk and Recorder, County of Lincoln. This "corner record" Sec. 26/T 30N/R 31W was filed for record on the 21<sup>ST</sup> day of NOV. 1983, was noted on the cross-index plat and is assigned page No. 2361, in book No. Janet BF Siegel by Betty L. Conces County Official deputy

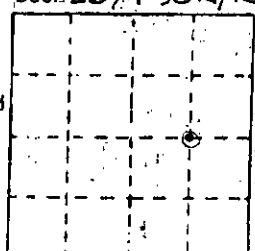

Cross Index No. 30 R. 31 P.M.M.

1944  
MAY 10  
MEMORANDUM  
FOR THE RECORD  
SUBJECT: [Illegible]

1. [Illegible]  
2. [Illegible]  
3. [Illegible]  
4. [Illegible]  
5. [Illegible]

1944



1944