- quent record used to evaluate the corner position
- 2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated
- 4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.

 5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
- opportung des., position of accessories, etc.

 5. Certification must be signed and scaled by Land Surveyor registered in the State of Montana

 6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner NORTH /4 COR. SECTION 9 T. 30 N, R. 31 W, P.M.M., LINCOLN

RECORD:

Brass cap on iron post, set in concrete, level with surface of ground and marked:

T30N R31W

from which:

a spruce 12" dia. bears N10°E 55 links (36.3')

a "X" chiseled on top of conc. curb, 6" wide, bears EAST 9 links (5.91')

FOUND:


2 1/2" B.C. set in concrete, down 1.6' from ground surface.


1.5'x5/8" rebar and yellow plastic cap marked "BRIEN 7681 S" on top of B.C. to surface, from which:

a set 40d spike in a 12" spruce bears S59°W 38.61'

a set 40d spike in a light pole bears S06°E 9.82° a found 5/8" rebar bears North 29.9°

NOTE: Used a Silva hand compass with 18° E declination preset.

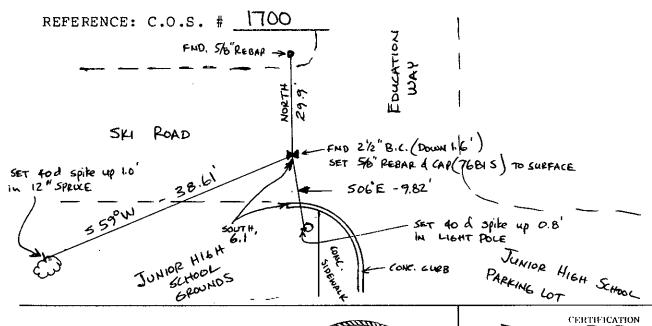



P. BRIEN

Signature Ground Party Chief BEIEN P. DANIEL certify that this Corner Record correctly represents work performed by me of under my direction in compliance with the Recordation Act. (1972) 101 at seq., Ja.C.A.)

5/16/89 Reg. No. 7681 5 LAND SURVEY Employer: HERSMAN

SKETCH OF CORNER

Office of Clerk and Recorder, County of Lincoln . This "corner record" was filed for record on ... Quy 7, 1989 was noted on the cross-index plat and is assigned page No. _ book No.

Signal by County Official

corner this sheet

E-11