

CERTIFIED CORNER RECORDATION

Corner: SE Sec. 16 Twp. 30 N., R. 33 W., P.M.M.
Section Corner common to 15, 16, 21 & 22

Lincoln County Montana

Record :

Per original GLO notes of Daniel P. Mumbrue 1894. Set a quartzite stone 12 X 10 X 10 inch. 8 inches in the ground for corner to secs. 15, 16, 21, & 22 marked with 3 notches on S and E edges from which:

A Fir tree 12 ins. diam. bears N 17 1/4° E. 27 lks. distance marked
T 30 N. R. 33 W. S. 15 B.T.

A Tamarack 18 ins. diam. bears S 13 1/2° E. 158 lks. distance marked
T 30 N. R. 33 W. S. 22 B.T.

A Pine tree 20 ins. diam. bears S 14 3/4° W. 31 lks. distance marked
T 30 N. R. 33 W. S. 21 B.T.

A Pine tree 18 ins. diam. bears N 54° W. 66 lks. distance marked
T 30 N. R. 33 W. S. 16 B.T.

Found Evidence :

Original 12 inch. Fir (now a 27 1/2 inch DBH) for section 15 scribing not legible.

Original 20 inch. Pine (now a 36 inch DBH) for section 21 scribing not legible.

Perpetuation :

Set a 3 1/4 inch X 30 inch long 3 inch OD aluminum monument 24 inches in the ground (see diagram below)

From which I established the following four new bearing trees:

A 7 1/2 inch DBH Cedar scribed X BT bears S 58° W 37. 6 ft. distance for section 21.

A 7 inch DBH Douglas Fir scribed X BT bears N 31° W 23.3 ft. distance for section 16.


Tagged on original 24 1/2 inch DBH Douglas Fir (scribing not legible) bears N 21° E. 17.8 ft. distance in section 15.

A 27 1/2 inch DBH Douglas Fir scribed T 30N R 33 W S 15 BT bears N 76° E. 36.6 ft. distance for section 15.

A 9 1/2 inch DBH Douglas Fir scribed T 30N R 33 W S 22 BT bears S 20° E. 29.0 ft. distance for section 22.

Tagged an original 36 inch DBH Ponderosa Pine (scribing not legible) bears S 02° E. 20.4 ft. distance in section 21.

Painted 6 inch Wide Bands and attached warning and bearing tree signs to all trees.

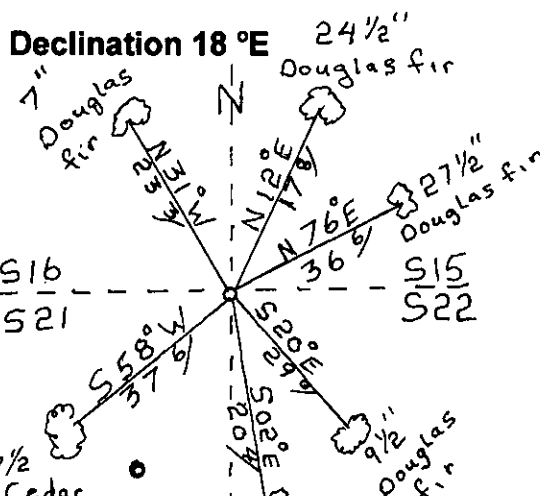

Sketch of Corner

Office of Clerk and Recorder, County of Lincoln

This "corner record" was filed for record on June 14, 2001 10537
was noted on the cross-index plat and is assigned page No.

in book No. _____ Coal M. Cunningham By RLB
County Official

Cross Index No. Twp. 30 N., R. 30 W., P.M.M.

• THIS CORNER

CERTIFICATION

I, George Clark
certify the information shown herein is true and correct

Signature of Ground Party Chief

I, Kenneth E. Davis
certify that this Corner Record correctly represents work performed by
me or under my direction in compliance with the "Corner Recordation

(702-404-1000, U.S.A.)

Signature of Surveyor Seal

Reg. No. 4975-S

Employer: Davis Surveying, Inc.

NO SURVEY

Section

