CERTIFIED CORNER RECORDATION

Corner 1/4 Secs. 19 & 30 T 30 N. R. 33 W . P.M.M. LINCOLN County

Record:

1893 original record by Daniel P. Mumbrue: 38.41 chains, "Set a post 3 ft. long, 3 ins. square, 24 ins. in the ground, for 1/4 sec. cor., marked 1/4 S., on N. face; from which:

A fir, 12 ins. diam., bears N11 3/4°W, 31 lks. distant marked 1/4 S BT.

A fir, 9 ins. diam., bears S53°E, 35 lks. distant marked 1/4 S BT.

1978 Certified Corner Recordation by Melvin D Lauteren: No evidence found. Set by single proportion. The N 1/4 corner of Section 30, T30N, R33W, P.M.M. is a 2"x24" steel pipe and a brass cap placed 24" into the ground, stamped as shown, from which:

A 2.0' diam. pine (yellow), bears N25'W, a distance of 38.30 feet., scribed 1/4

A 1.6' diam. red fir, bears S10°W, a distance of 64.15 feet, scribed 1/4 S 30 BT.



Found a 2 1/2 in. diam. brass cap, flush with the ground, mkd. as shown, from which:

A pine, 28 ins. diam., bears N25"W, 38.3 ft. dist. mkd. 1/4 S19 BT. A fir, 20 ins. diam., bears S10W, 64.1 ft. dist., mkd. with a healed face.



NOTE: No record of when "1997" was added to the cap.


Set a 6 ft. galvanized steel guard post 3.0 ft. north, with Property Boundary and Land III. Survey Monument decals attached. Attached Bearing Tree and Land Survey Monument signs to the bearing trees. Painted red bands around the bearing trees.


Date of Fieldwork: 6/20/2001

Survey crew: Steve Boyer, Tom Hommel Magnétic declination: 20° East assumed

Equipment used: Hand compass and loggers tape

U.S. Forest Service, Supervisiors Office, 1101 Hwy. 2 West, Libby, MT 59923 (406) 293-6211

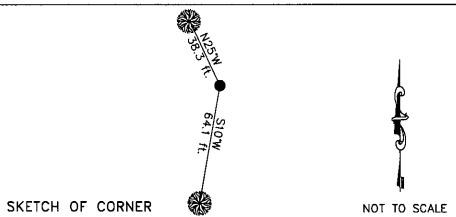




Lincoln Office of Clerk and Recorder, County of _ Feb 19, 2002 record" was filed for record on was noted on the cross—index plat and is assigned page No. book No. LIMMIN County Official

Cross Index No. R-03 T. 30N. R. 33W. P.M., MT

Adopted July 1, 1981, Montana Board of Professional Engineers & Land Surveyors



· corner this sheet