

CERTIFIED CORNER RECORDATION

CORNER E 1/4 COR S 17 T. 30 N., R. 33 W., P.M.M. LINCOLN COUNTY

RECORD:

Per GLO of Daniel P. Mumbrue contract No. 287 of 1893

Set a post 3 feet long 3 inches square 24 inches in the ground for 1/4 Sec. Cor., marked 1/4 S from which

A Tamarack 18 inch dia. bears S 4 3/4° E 213 lks, distant marked 1/4 S BT.

A Douglas Fir 24 inch dia. bears N 85 1/2° W 28 lks., distant marked 1/4 S BT.

FOUND EVIDENCE:

A ring of rocks with a small stick in the center of the ring

PERPETUATION:

Set a 3 1/4 inch aluminum cap stamped (see diagram below) on a 5/8 inch dia. rebar 20 inches long. From which


A 8.5 inch DBH Douglas Fir scribed S 17 1/4 BT. bears N 19° W 25.2 feet.

A 16.5 inch DBH Douglas Fir scribed T30N R33W S 16 1/4 BT. bears S 62° E 10.5 feet.

Painted 6 inch bands and attached bearing tree signs to trees.

MAGNETIC DECLINATION: 18° E

8.5" Douglas Fir

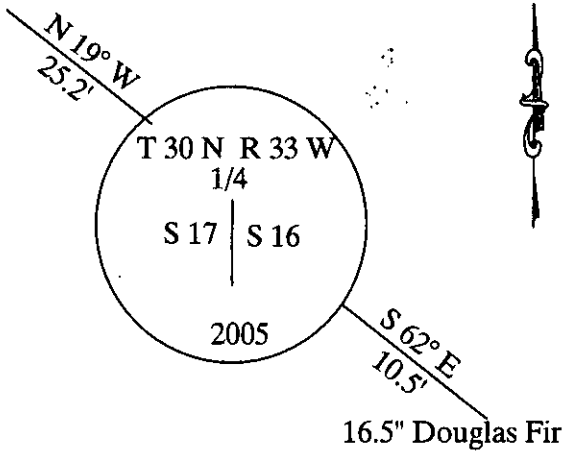

CERTIFICATION

I, GEORGE CLARK

Certify the information shown herein is true and correct

George Clark
Signature of Ground Party Chief

I, KENNETH E. DAVIS

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Record Act"

(§ 2-2-101, et seq., M.C.A.)

KENNETH E. DAVIS
Signature of Surveyor & Seal

Date: 04/08/2005 Reg. No. 14975-S


Exp. Date: 04/08/2007 *Surveying Ink*



SKETCH OF CORNER

SECTION

Office of Clerk and Recorder
183622 BOOK: CCR CC&R'S PAGE: 10785 Pages: 1
This STATE OF MONTANA LINCOLN COUNTY
WAS RECORDED: 04/08/2005 8:30 KOI: CC&R'S
No. CORAL M. CUMMINGS CLERK AND RECORDER
In bc FEE: \$0.00 BY: *Coral M. Cummings*
TO: FILED Deputy



Cross Index No. E 1/4 Cor S 17 T. 30 N., R. 33 W., P.M.M.

THIS CORNER