

# CERTIFIED CORNER RECORDATION

CORNER E 1/4 COR S 17 T. 30 N., R. 33 W., P.M.M. LINCOLN COUNTY

## RECORD:

Per GLO of Daniel P. Mumbrue contract No. 287 of 1893

Set a post 3 feet long 3 inches square 24 inches in the ground for 1/4 Sec. Cor., marked 1/4 S from which

A Tamarack 18 inch dia. bears S 4 3/4° E 213 lks, distant marked 1/4 S BT.

A Douglas Fir 24 inch dia. bears N 85 1/2° W 28 lks., distant marked 1/4 S BT.

## FOUND EVIDENCE:

A ring of rocks with a small stick in the center of the ring

## PERPETUATION:

Set a 3 1/4 inch aluminum cap stamped (see diagram below) on a 5/8 inch dia. rebar 20 inches long. From which


A 8.5 inch DBH Douglas Fir scribed S 17 1/4 BT. bears N 19° W 25.2 feet.

A 16.5 inch DBH Douglas Fir scribed T30N R33W S 16 1/4 BT. bears S 62° E 10.5 feet.

Painted 6 inch bands and attached bearing tree signs to trees.

## MAGNETIC DECLINATION: 18° E

8.5" Douglas Fir

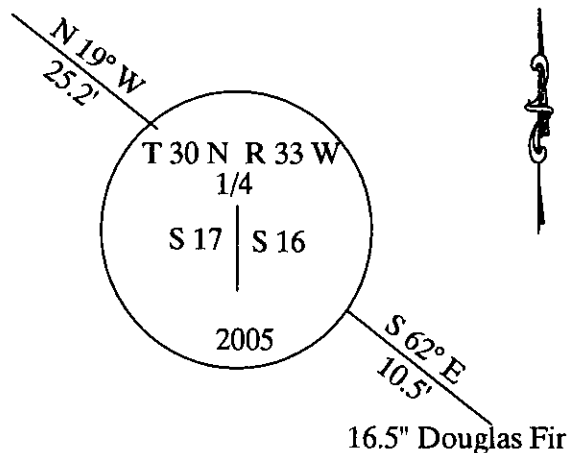

## CERTIFICATION

I, GEORGE CLARK

Certify the information shown herein is true and correct

Signature of Ground Party Chief

I. KENNETH E. DAVIS

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Signature of Surveyor & Seal

Date: 04/08/2005 4975-S


Employer: S. S. S. Surveying INC

## SKETCH OF CORNER

Office of: 183627 BOOK: CCR CC&R'S PAGE: 10789 Pages: 1  
This "co": STATE OF MONTANA LINCOLN COUNTY  
was not: RECORDED: 04/08/2005 9:05 KOI: CC&R'S  
No. CORAL M. CUMMINGS CLERK AND RECORDER  
FEE: \$0.00 BY: Joanne Seaning  
In book TO: FILED

County Official

## SECTION



Cross Index No. E 1/4 Cor S 17 T. 30 N., R. 33 W., P.M.M.

THIS CORNER