

**CERTIFIED LAND CORNER RECORDATION**

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

See sketch on reverse side:

1. Reported: 36" fir on line 4' west of  $\frac{1}{4}$  cor. 24" larch N42-3/4W 13 lks.(found)  
12" spruce S76 $\frac{1}{2}$ E 22lks. (Not found)
2. Reported: post for Section cor. from which 4" pine bears N33E 24lks. - a 4" pine  
bears S69 $\frac{1}{4}$ W 30 lks. -(found remains illegible) - a 6" larch bears  
S34-3/4E 75 lks. ( found stump, fragments entirely legible)
3. Reported: post for  $\frac{1}{4}$  cor. from which an 8" pine bears N31 $\frac{1}{2}$ W 18 lks. (found)  
an 8" pine bears S 2 W 39 lks. (found) Both legible.
4. Reported: post for  $\frac{1}{4}$  cor. from which an 8" pine bears N34 $\frac{1}{4}$ E 9 lks. Found  
stump - fragments entirely legible. An 30" fir bears N 66 $\frac{1}{2}$ W 26 lks.  
Found rotted remains not legible.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED  
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

SEE REVERSE

Date of work: Sept 1964

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY.  
(MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

See Reverse

Surveyor's Seal


I, J. W. Sinneman  
certify that the information shown herein is true and  
correct.

J. W. Sinneman  
Signature of Ground Party Chief

I, J. W. Sinneman  
certify that I have carefully performed or reviewed the  
work done on the diagrammed corner as reported on this  
recording form and approve the same.

J. W. Sinneman  
Signature of Surveyor

DIAGRAM OF CORNER:

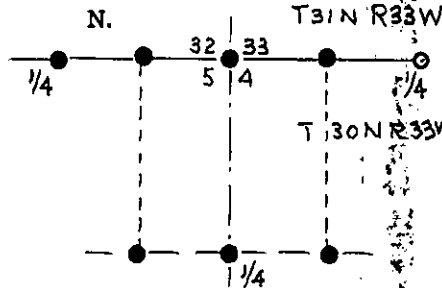

● = Corner recorded on the sheet

See reverse

534 ES  
Registration Number

Office of Clerk and Recorder, County of Lincoln, Libby, Montana

This "corner record" was filed for record on the 5th day of October 1964, was noted on the cross-index plat and is

assigned page No. 23 in book No. 1 M. M. MANSFIELD, By: Mae Watson

County Official 30 Deputy 33  
Cross Index No. 2-7-11 & 31 33 Mer. 33  
X-8-10

SEE SKETCH BELOW

1. Tagged with Std. bearing tree sign original witness - windfall stump 24" larch N42-3/4W 13 lks. - Set a 3/4" steel rod 38" long 26" in ground for 1/4 Corner from which a 4" balsalm bears East 16 ft. Marked S 5 1/4 BT and tagged with std. bearing tree sign.
2. Set a 1" pipe six feet long 5 feet in ground for Section cor 4,5,32,33 from which an 8" pine bears S73°30'W 15.5 ft. marked S 5 BT and an 8" pine bears S46 1/2 E 19.2 feet marked S 4 BT and tagged with std. B. T. Sign.
3. Did not re establish this corner - both witness stumps in place and legible.
4. Set a 1 1/2" pipe for 1/4 Cor. from which an 18" larch bears S 19°W 14.2 feet marked 1/4 S B T 5 and tagged with std bearing tree sign. And a 7" larch bears N23°E 18.5 feet marked 1/4 S 4 B T (not tagged)
5. Set a 1 1/4" pipe 4" above ground in open field half way between section corner and 1/4 corner - 52 feet north of wire fence approx 200 feet east of County Road - for NW Cor Lot 1 Sec. 5 T.30N., R.33W., M.P.M.
6. Set a 1" pipe 12" above ground on SE slope near top of bench for NE cor. of Lot 4 Sec. 4 T. 30N., R. 33 W., M.P.M. from which a 4" pine bears N62°W 5 feet marked NE cor L. 4 S. 4 5'
7. Set a 3/4 rod 36" long 12" above ground 176 feet west of Lake Cr. in horse-shoe bend of Creek - for SE cor. of SE 1/4 NE 1/4 Sec. 5 T. 30 N. R. 33 W., M.P.M. from which a 24" cottonwood bears SW of cor. 12 feet
8. Set a 3/4" pipe 4" above ground in small clearing 8 feet east of an old road for SE cor. of SW 1/4 NW 1/4 Sec. 4 T. 30 N., R. 33 W., M.P.M. from which a blazed 5" pine bears North 7 1/2 feet.

