- Original and/or subsequent record used to evaluate the corner position,

- Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.

 Description of monument and accessories set to perpetuate the corner position.

 Sketch or corner, show all perfinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
- Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
- Fill in Cross Index & Section Diagram at bottom of sheet.


CERTIFIED CORNER RECORDATION

Corner PROP. COR. SECTION 20 T. 30 N. R. 33 W. P.M.M. Lincoln County

- 1} NO PREVIOUS RECORD
- EVIDENCE FOUND: a 4x4 inch Square Concrete Highway R/W Monument at approximate corner position; from true corner position, found a 3/4 inch dia. steel rod bearing N40°15'03"U.,

2.00 feet distant.

- 3} ACCESSORIES SET TO PERPETUATE CORNER: from the true corner position at a distance of 2.00 feet S.40°15'03"E. from the 3/4 inch dia. steel rod, we establish:
 - a Spruce. & ins. dia., bearing S.&oW., 1.9 ft. dist. blazed and scribed: RM, and painted red
 - a Lodgepole Pine, 4 ins. dia., bearing N.26°W., 12.7 ft. dist. with St. Regis Location Poster

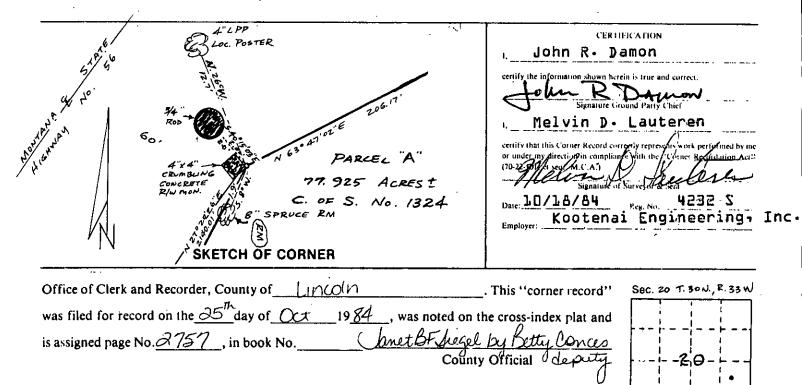

corner this sheet