## INSTRUCTIONS


- 1. Original and/or subsequent record used to evaluate the corner position.
- Description of evidence Is and, note discrepancies in the record, state method of establishing lost or obliterated corners.
- Description of monument and accessories set to perpetuate the corner position.

  Sketch of corner, show all periment data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
- Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
- Fill in Cross Index & Section Diagram at bottom of sheet.

## **CERTIFIED CORNER RECORDATION**

Corner 1/4 SEC. 20 + SEC. 21 T. 30 N., R. 33 U., P.M.M. LINCOLN

- ORIGINAL RECORD: The Original Corner was a Pine, & ins. dia. 13 which fell at the corner position and was blazed and scribed 1/4 S on the West side, from which:
  - a Fir, & ins. dia., bears N. 68°E., 31 lks. dist., blazed and scribed 1/4 S 21 BT
  - a Fir, 18 ins. dia., bears S.71°30'W., 8 lks. dist., blazed and scribed 1/4 S 20 BT
- EVIDENCE FOUND: Found a 3/4 inch dia. Steel Rebar 5}
- 3} ACCESSORIES SET TO PERPETUATE CORNER: From the 3/4 inch dia. Steel Rebar:
  - a Grand Fir, 7 ins. dia., bears N.83°E., 11.2 ft. dist. blazed and scribed 1/4 S 21 BT, and painted red
  - a Tamarack, 10 ins. dia., bears S.l°E, 14.4 ft. dist. blazed and scribed 1/4 S 20 BT, and painted red

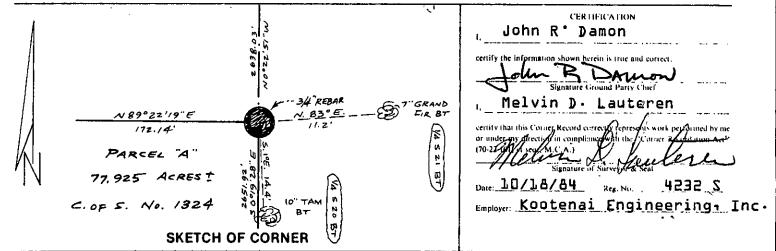

Office of Clerk and Recorder, County of Incoln	. This "corner record"	Sec. 20 T	.30N., R	. 33 W.
	ne cross-index plat and			
is assigned page No. <u>2760</u> , in book No. <u>linet BF fiecel</u> County	by betty Conces Official deputy		2 <sub>0</sub> -	
Cross Index No	R. PMM			

· corner this sheet