

- INSTRUCTIONS**
1. Original and/or subsequent record used to evaluate the corner position.
 2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
 3. Description of monument and accessories set to perpetuate the corner position.
 4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
 5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
 6. Fill in Cross Index & Section Diagram at bottom of sheet.


CERTIFIED CORNER RECORDATION

Corner E 1/16 Section 7 T. 30 N R. 33 W P.M.M. Lincoln County

I. I found a drill steel and 2 BT's marked JN 534 ES.


II. Davis Surveying, Inc. 1987

I reset in the same position as the found drill steel a $3\frac{1}{2}$ inch dia. aluminum cap on a 2' long rebar stamped:

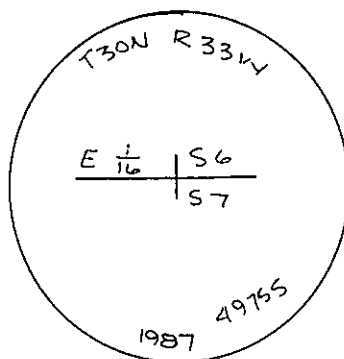

from which;

A 7" pine bears S 60° W 20.5 feet from center of tree scribed: E 1/16 BT.
 A 10" pine bears S 35° E 15.6 feet from center of tree scribed: E 1/16 BT.
 Painted 6" red bands around trees and attached location sign on front and warning signs on back of trees.

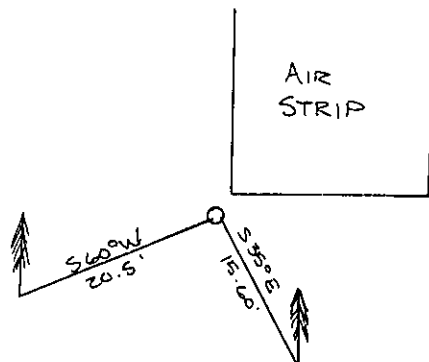

SKETCH OF CORNER

CERTIFICATION

I, KEN E. DAVIS
 certify the information shown herein is true and correct.

Tom DAVIS
 Signature Ground Party Chief

I, KEN E. DAVIS
 certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Ken E. Davis
 Signature of Surveyor & Seal


Date: 9/87 Reg. No. 49755

Employer: DAVIS SURVEYING INC.

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on Sept 17, 1987

was noted on the cross-index plat and is assigned page No. 3656, in book No. _____

Grant BF Siegel by Dore Dackoff
 County Official Deputy



• - corner this sheet