

- INSTRUCTIONS**
1. Original and/or subsequent record used to evaluate the corner position.
 2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
 3. Description of monument and accessories set to perpetuate the corner position.
 4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
 5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
 6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner Center Section 7 T. 30 N R. 33 W P.M.M. Lincoln County

I. Ninneman Engineering

Corner set per C. of S. No. 357 but not found.

II. Davis Surveying, Inc. 1987

I set a 5/8 inch dia. x 24' long rebar with plastic cap marked: K.E.D. 4975 S. from which;

A 8" pine bears S 42° E 3.8 feet from center of tree.


Scribed: C $\frac{1}{4}$ BT.

A 8" pine bears S 85° W 2.5 feet from center of tree.

Scribed: C $\frac{1}{4}$ BT.

Notched BT's at root crown.

Painted a 6" band around tress and placed location signs on front.

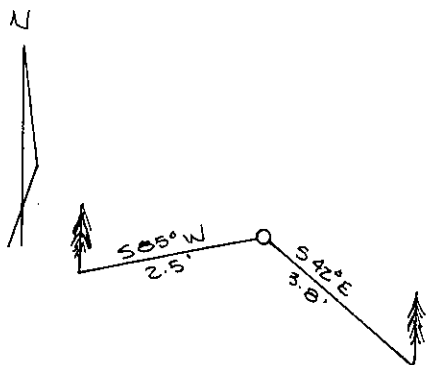

SKETCH OF CORNER

CERTIFICATION

I, KEN E. DAVIS
certify the information shown herein is true and correct.

Tom DAVIS
Signature Ground Party Chief

I, KEN E. DAVIS
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Ken E. Davis
Signature of Surveyor & Seal


Date: 9/87 Reg. No. 49755

Employer: DAVIS SURVEYING INC.

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on Sept

was noted on the cross-index plat and is assigned page No. 3658 in book No. _____

Janet Et Supel by Bill Smith
County Official Deputy



• - corner this sheet