

CERTIFIED LAND CORNER RECORDATION
(REFERENCE FSM 7153.53)

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work: 10/1/80

Set standard Aluminum Post & cap 24" in the ground in mound of rock.

Bearing trees,

12" Cedar S. 8° E. 25.9 feet	Mkd. C 1/4 S 26 BT
11" Larch N. 16° E. 6.0 feet	Mkd. C 1/4 S 26 BT


Bearing tree tags affixed & Location poster

Brass tags # ~~###~~ set at base of BTs at root crown distance from corner
2968 S

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY.
(MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

See Survey Plat, South fork Keeler, T. 30 N., R. 34 W., P.M.

Surveyor's Seal

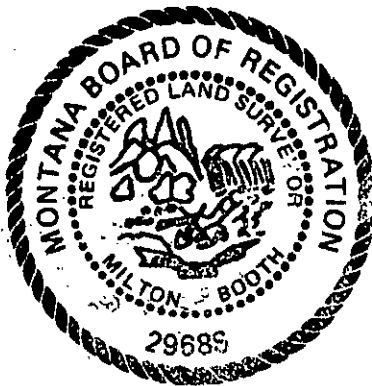

I, _____
certify that the information shown herein is true and correct.

Signature of Ground Party Chief

Milton I. Booth


I, _____
certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Milton I. Booth
Signature of Surveyor

2968 S

Registration Number

DIAGRAM OF CORNER:

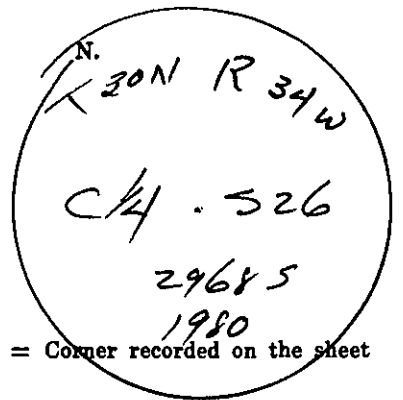

Office of Clerk and Recorder, County of Lincoln

This "corner record" was filed for record on the 1st day of September 1981, was noted on the cross-index plat and is assigned page No. 1197, in book No. 1

James L. Thompson, Jr. Deputy Clerk, Deputy
County Official

Cross Index No. T-19 T. 30N R. 34W P. Mer.